

# Web on Reactive Stack

Version 5.1.15.RELEASE

# Table of Contents

1. Spring WebFlux .....	2
1.1. Overview .....	2
1.1.1. Define “Reactive” .....	2
1.1.2. Reactive API .....	3
1.1.3. Programming Models .....	3
1.1.4. Applicability .....	4
1.1.5. Servers .....	5
1.1.6. Performance .....	5
1.1.7. Concurrency Model .....	6
1.2. Reactive Core .....	7
1.2.1. HttpHandler .....	7
1.2.2. WebHandler API .....	9
Special bean types .....	9
Form Data .....	10
Multipart Data .....	10
Forwarded Headers .....	11
1.2.3. Filters .....	11
CORS .....	12
1.2.4. Exceptions .....	12
1.2.5. Codecs .....	12
Jackson JSON .....	13
Form Data .....	13
Multipart .....	14
Limits .....	14
Streaming .....	14
DataBuffer .....	15
1.2.6. Logging .....	15
Log Id .....	15
Sensitive Data .....	15
Custom codecs .....	16
1.3. DispatcherHandler .....	16
1.3.1. Special Bean Types .....	17
1.3.2. WebFlux Config .....	18
1.3.3. Processing .....	18
1.3.4. Result Handling .....	18
1.3.5. Exceptions .....	19
1.3.6. View Resolution .....	19
Handling .....	19
Redirecting .....	20

Content Negotiation .....	20
1.4. Annotated Controllers .....	21
1.4.1. @Controller .....	21
1.4.2. Request Mapping .....	22
URI Patterns .....	23
Pattern Comparison .....	25
Consumable Media Types .....	25
Producible Media Types .....	25
Parameters and Headers .....	26
HTTP HEAD, OPTIONS .....	27
Custom Annotations .....	27
Explicit Registrations .....	27
1.4.3. Handler Methods .....	28
Method Arguments .....	28
Return Values .....	30
Type Conversion .....	31
Matrix Variables .....	32
@RequestParam .....	33
@RequestHeader .....	34
@CookieValue .....	35
@ModelAttribute .....	36
@SessionAttributes .....	38
@SessionAttribute .....	39
@RequestAttribute .....	39
Multipart Content .....	40
@RequestBody .....	42
HttpEntity .....	43
@ResponseBody .....	43
ResponseEntity .....	44
Jackson JSON .....	44
1.4.4. Model .....	45
1.4.5. DataBinder .....	47
1.4.6. Managing Exceptions .....	48
REST API exceptions .....	49
1.4.7. Controller Advice .....	50
1.5. Functional Endpoints .....	50
1.5.1. Overview .....	51
1.5.2. HandlerFunction .....	52
ServerRequest .....	53
ServerResponse .....	54
Handler Classes .....	54
Validation .....	55
1.5.3. RouterFunction .....	56

Predicates .....	56
Routes .....	57
Nested Routes .....	58
1.5.4. Running a Server .....	59
1.5.5. Filtering Handler Functions .....	60
1.6. URI Links .....	62
1.6.1. UriComponents .....	62
1.6.2. UriBuilder .....	63
1.6.3. URI Encoding .....	64
1.7. CORS .....	66
1.7.1. Introduction .....	66
1.7.2. Processing .....	66
1.7.3. @CrossOrigin .....	67
1.7.4. Global Configuration .....	69
1.7.5. CORS WebFilter .....	70
1.8. Web Security .....	71
1.9. View Technologies .....	71
1.9.1. Thymeleaf .....	71
1.9.2. FreeMarker .....	72
View Configuration .....	72
FreeMarker Configuration .....	73
1.9.3. Script Views .....	73
Requirements .....	74
Script Templates .....	74
1.9.4. JSON and XML .....	77
1.10. HTTP Caching .....	77
1.10.1. CacheControl .....	77
1.10.2. Controllers .....	78
1.10.3. Static Resources .....	79
1.11. WebFlux Config .....	79
1.11.1. Enabling WebFlux Config .....	79
1.11.2. WebFlux config API .....	80
1.11.3. Conversion, formatting .....	80
1.11.4. Validation .....	81
1.11.5. Content Type Resolvers .....	82
1.11.6. HTTP message codecs .....	82
1.11.7. View Resolvers .....	83
1.11.8. Static Resources .....	85
1.11.9. Path Matching .....	86
1.11.10. Advanced Configuration Mode .....	87
1.12. HTTP/2 .....	88

2. WebClient .....	89
2.1. Configuration .....	89

This part of the documentation covers support for reactive-stack web applications built on a [Reactive Streams](#) API to run on non-blocking servers, such as Netty, Undertow, and Servlet 3.1+ containers. Individual chapters cover the [Spring WebFlux](#) framework, the reactive [WebClient](#), support for [testing](#), and [reactive libraries](#). For Servlet-stack web applications, see [Web on Servlet Stack](#).

# Chapter 1. Spring WebFlux

The original web framework included in the Spring Framework, Spring Web MVC, was purpose-built for the Servlet API and Servlet containers. The reactive-stack web framework, Spring WebFlux, was added later in version 5.0. It is fully non-blocking, supports [Reactive Streams](#) back pressure, and runs on such servers as Netty, Undertow, and Servlet 3.1+ containers.

Both web frameworks mirror the names of their source modules ([spring-webmvc](#) and [spring-webflux](#)) and co-exist side by side in the Spring Framework. Each module is optional. Applications can use one or the other module or, in some cases, both — for example, Spring MVC controllers with the reactive [WebClient](#).

## 1.1. Overview

Why was Spring WebFlux created?

Part of the answer is the need for a non-blocking web stack to handle concurrency with a small number of threads and scale with fewer hardware resources. Servlet 3.1 did provide an API for non-blocking I/O. However, using it leads away from the rest of the Servlet API, where contracts are synchronous ([Filter](#), [Servlet](#)) or blocking ([getParameter](#), [getPart](#)). This was the motivation for a new common API to serve as a foundation across any non-blocking runtime. That is important because of servers (such as Netty) that are well-established in the async, non-blocking space.

The other part of the answer is functional programming. Much as the addition of annotations in Java 5 created opportunities (such as annotated REST controllers or unit tests), the addition of lambda expressions in Java 8 created opportunities for functional APIs in Java. This is a boon for non-blocking applications and continuation-style APIs (as popularized by [CompletableFuture](#) and [ReactiveX](#)) that allow declarative composition of asynchronous logic. At the programming-model level, Java 8 enabled Spring WebFlux to offer functional web endpoints alongside annotated controllers.

### 1.1.1. Define “Reactive”

We touched on “non-blocking” and “functional” but what does reactive mean?

The term, “reactive,” refers to programming models that are built around reacting to change — network components reacting to I/O events, UI controllers reacting to mouse events, and others. In that sense, non-blocking is reactive, because, instead of being blocked, we are now in the mode of reacting to notifications as operations complete or data becomes available.

There is also another important mechanism that we on the Spring team associate with “reactive” and that is non-blocking back pressure. In synchronous, imperative code, blocking calls serve as a natural form of back pressure that forces the caller to wait. In non-blocking code, it becomes important to control the rate of events so that a fast producer does not overwhelm its destination.

Reactive Streams is a [small spec](#) (also [adopted](#) in Java 9) that defines the interaction between asynchronous components with back pressure. For example a data repository (acting as [Publisher](#)) can produce data that an HTTP server (acting as [Subscriber](#)) can then write to the response. The

main purpose of Reactive Streams is to let the subscriber to control how quickly or how slowly the publisher produces data.



**Common question: what if a publisher cannot slow down?**

The purpose of Reactive Streams is only to establish the mechanism and a boundary. If a publisher cannot slow down, it has to decide whether to buffer, drop, or fail.

### 1.1.2. Reactive API

Reactive Streams plays an important role for interoperability. It is of interest to libraries and infrastructure components but less useful as an application API, because it is too low-level. Applications need a higher-level and richer, functional API to compose async logic — similar to the Java 8 `Stream` API but not only for collections. This is the role that reactive libraries play.

`Reactor` is the reactive library of choice for Spring WebFlux. It provides the `Mono` and `Flux` API types to work on data sequences of 0..1 (`Mono`) and 0..N (`Flux`) through a rich set of operators aligned with the ReactiveX [vocabulary of operators](#). `Reactor` is a Reactive Streams library and, therefore, all of its operators support non-blocking back pressure. `Reactor` has a strong focus on server-side Java. It is developed in close collaboration with Spring.

WebFlux requires `Reactor` as a core dependency but it is interoperable with other reactive libraries via Reactive Streams. As a general rule, a WebFlux API accepts a plain `Publisher` as input, adapts it to a `Reactor` type internally, uses that, and returns either a `Flux` or a `Mono` as output. So, you can pass any `Publisher` as input and you can apply operations on the output, but you need to adapt the output for use with another reactive library. Whenever feasible (for example, annotated controllers), WebFlux adapts transparently to the use of RxJava or another reactive library. See [\[webflux-reactive-libraries\]](#) for more details.

### 1.1.3. Programming Models

The `spring-web` module contains the reactive foundation that underlies Spring WebFlux, including HTTP abstractions, Reactive Streams [adapters](#) for supported servers, [codecs](#), and a core `WebHandler` API comparable to the Servlet API but with non-blocking contracts.

On that foundation, Spring WebFlux provides a choice of two programming models:


- **Annotated Controllers:** Consistent with Spring MVC and based on the same annotations from the `spring-web` module. Both Spring MVC and WebFlux controllers support reactive (`Reactor` and `RxJava`) return types, and, as a result, it is not easy to tell them apart. One notable difference is that WebFlux also supports reactive `@RequestBody` arguments.
- **Functional Endpoints:** Lambda-based, lightweight, and functional programming model. You can think of this as a small library or a set of utilities that an application can use to route and handle requests. The big difference with annotated controllers is that the application is in charge of request handling from start to finish versus declaring intent through annotations and being called back.



### 1.1.4. Applicability

#### Spring MVC or WebFlux?

A natural question to ask but one that sets up an unsound dichotomy. Actually, both work together to expand the range of available options. The two are designed for continuity and consistency with each other, they are available side by side, and feedback from each side benefits both sides. The following diagram shows how the two relate, what they have in common, and what each supports uniquely:

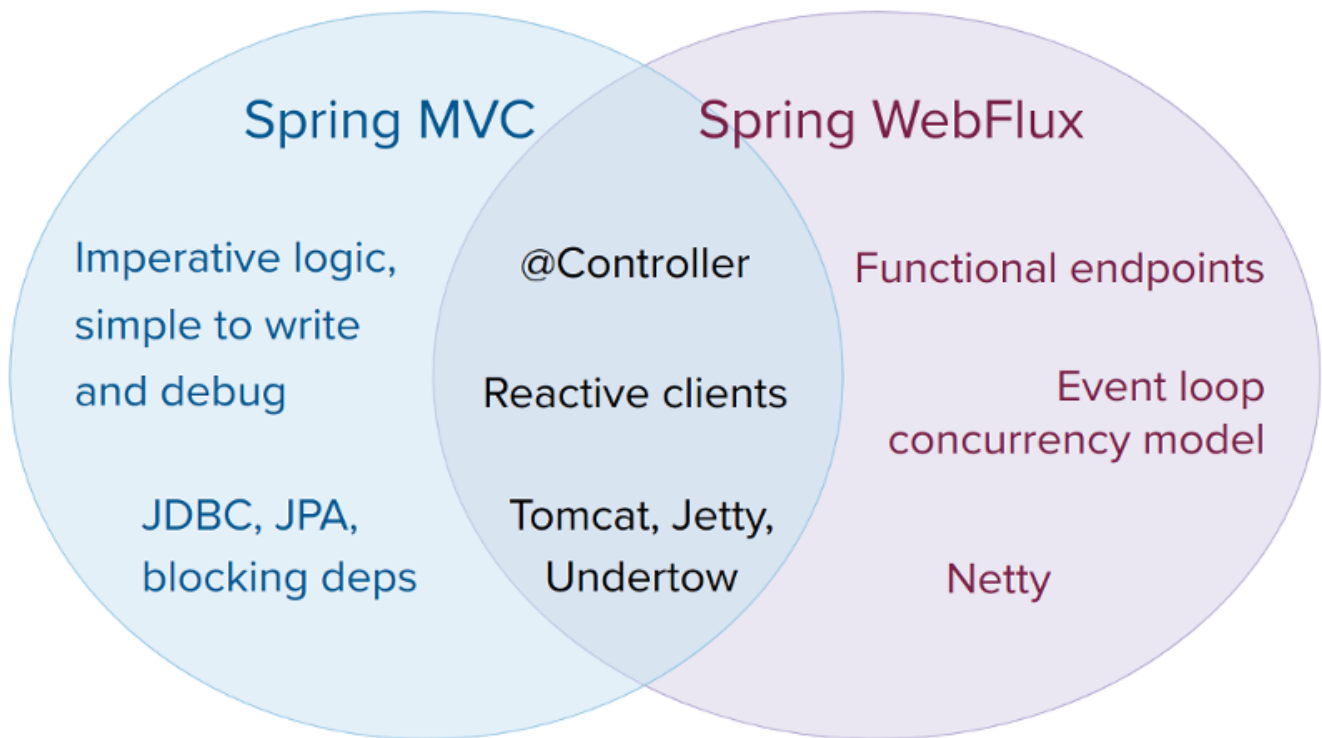

We suggest that you consider the following specific points:

- If you have a Spring MVC application that works fine, there is no need to change. Imperative programming is the easiest way to write, understand, and debug code. You have maximum choice of libraries, since, historically, most are blocking.
- If you are already shopping for a non-blocking web stack, Spring WebFlux offers the same execution model benefits as others in this space and also provides a choice of servers (Netty, Tomcat, Jetty, Undertow, and Servlet 3.1+ containers), a choice of programming models (annotated controllers and functional web endpoints), and a choice of reactive libraries (Reactor, RxJava, or other).
- If you are interested in a lightweight, functional web framework for use with Java 8 lambdas or Kotlin, you can use the Spring WebFlux functional web endpoints. That can also be a good choice for smaller applications or microservices with less complex requirements that can benefit from greater transparency and control.
- In a microservice architecture, you can have a mix of applications with either Spring MVC or Spring WebFlux controllers or with Spring WebFlux functional endpoints. Having support for the same annotation-based programming model in both frameworks makes it easier to re-use knowledge while also selecting the right tool for the right job.
- A simple way to evaluate an application is to check its dependencies. If you have blocking

persistence APIs (JPA, JDBC) or networking APIs to use, Spring MVC is the best choice for common architectures at least. It is technically feasible with both Reactor and RxJava to perform blocking calls on a separate thread but you would not be making the most of a non-blocking web stack.

- If you have a Spring MVC application with calls to remote services, try the reactive [WebClient](#). You can return reactive types (Reactor, RxJava, [or other](#)) directly from Spring MVC controller methods. The greater the latency per call or the interdependency among calls, the more dramatic the benefits. Spring MVC controllers can call other reactive components too.
- If you have a large team, keep in mind the steep learning curve in the shift to non-blocking, functional, and declarative programming. A practical way to start without a full switch is to use the reactive [WebClient](#). Beyond that, start small and measure the benefits. We expect that, for a wide range of applications, the shift is unnecessary. If you are unsure what benefits to look for, start by learning about how non-blocking I/O works (for example, concurrency on single-threaded Node.js) and its effects.

### 1.1.5. Servers

Spring WebFlux is supported on Tomcat, Jetty, Servlet 3.1+ containers, as well as on non-Servlet runtimes such as Netty and Undertow. All servers are adapted to a low-level, [common API](#) so that higher-level [programming models](#) can be supported across servers.

Spring WebFlux does not have built-in support to start or stop a server. However, it is easy to [assemble](#) an application from Spring configuration and [WebFlux infrastructure](#) and [run it](#) with a few lines of code.

Spring Boot has a WebFlux starter that automates these steps. By default, the starter uses Netty, but it is easy to switch to Tomcat, Jetty, or Undertow by changing your Maven or Gradle dependencies. Spring Boot defaults to Netty, because it is more widely used in the asynchronous, non-blocking space and lets a client and a server share resources.

Tomcat and Jetty can be used with both Spring MVC and WebFlux. Keep in mind, however, that the way they are used is very different. Spring MVC relies on Servlet blocking I/O and lets applications use the Servlet API directly if they need to. Spring WebFlux relies on Servlet 3.1 non-blocking I/O and uses the Servlet API behind a low-level adapter and not exposed for direct use.

For Undertow, Spring WebFlux uses Undertow APIs directly without the Servlet API.

### 1.1.6. Performance

Performance has many characteristics and meanings. Reactive and non-blocking generally do not make applications run faster. They can, in some cases, (for example, if using the [WebClient](#) to execute remote calls in parallel). On the whole, it requires more work to do things the non-blocking way and that can increase slightly the required processing time.

The key expected benefit of reactive and non-blocking is the ability to scale with a small, fixed number of threads and less memory. That makes applications more resilient under load, because they scale in a more predictable way. In order to observe those benefits, however, you need to have some latency (including a mix of slow and unpredictable network I/O). That is where the reactive

stack begins to show its strengths, and the differences can be dramatic.

### 1.1.7. Concurrency Model

Both Spring MVC and Spring WebFlux support annotated controllers, but there is a key difference in the concurrency model and the default assumptions for blocking and threads.

In Spring MVC (and servlet applications in general), it is assumed that applications can block the current thread, (for example, for remote calls), and, for this reason, servlet containers use a large thread pool to absorb potential blocking during request handling.

In Spring WebFlux (and non-blocking servers in general), it is assumed that applications do not block, and, therefore, non-blocking servers use a small, fixed-size thread pool (event loop workers) to handle requests.



“To scale” and “small number of threads” may sound contradictory but to never block the current thread (and rely on callbacks instead) means that you do not need extra threads, as there are no blocking calls to absorb.

#### *Invoking a Blocking API*

What if you do need to use a blocking library? Both Reactor and RxJava provide the `publishOn` operator to continue processing on a different thread. That means there is an easy escape hatch. Keep in mind, however, that blocking APIs are not a good fit for this concurrency model.

#### *Mutable State*

In Reactor and RxJava, you declare logic through operators, and, at runtime, a reactive pipeline is formed where data is processed sequentially, in distinct stages. A key benefit of this is that it frees applications from having to protect mutable state because application code within that pipeline is never invoked concurrently.

#### *Threading Model*

What threads should you expect to see on a server running with Spring WebFlux?

- On a “vanilla” Spring WebFlux server (for example, no data access nor other optional dependencies), you can expect one thread for the server and several others for request processing (typically as many as the number of CPU cores). Servlet containers, however, may start with more threads (for example, 10 on Tomcat), in support of both servlet (blocking) I/O and servlet 3.1 (non-blocking) I/O usage.
- The reactive `WebClient` operates in event loop style. So you can see a small, fixed number of processing threads related to that (for example, `reactor-http-nio-` with the Reactor Netty connector). However, if Reactor Netty is used for both client and server, the two share event loop resources by default.
- Reactor and RxJava provide thread pool abstractions, called Schedulers, to use with the `publishOn` operator that is used to switch processing to a different thread pool. The schedulers have names that suggest a specific concurrency strategy—for example, “parallel” (for CPU-bound work with a limited number of threads) or “elastic” (for I/O-bound work with a large number of threads). If you see such threads, it means some code is using a specific thread pool `Scheduler` strategy.

- Data access libraries and other third party dependencies can also create and use threads of their own.

### Configuring

The Spring Framework does not provide support for starting and stopping [servers](#). To configure the threading model for a server, you need to use server-specific configuration APIs, or, if you use Spring Boot, check the Spring Boot configuration options for each server. You can [configure](#) the [WebClient](#) directly. For all other libraries, see their respective documentation.

## 1.2. Reactive Core

The [spring-web](#) module contains the following foundational support for reactive web applications:

- For server request processing there are two levels of support.
  - [HttpHandler](#): Basic contract for HTTP request handling with non-blocking I/O and Reactive Streams back pressure, along with adapters for Reactor Netty, Undertow, Tomcat, Jetty, and any Servlet 3.1+ container.
  - [WebHandler API](#): Slightly higher level, general-purpose web API for request handling, on top of which concrete programming models such as annotated controllers and functional endpoints are built.
- For the client side, there is a basic [ClientHttpConnector](#) contract to perform HTTP requests with non-blocking I/O and Reactive Streams back pressure, along with adapters for [Reactor Netty](#) and for the reactive [Jetty HttpClient](#). The higher level [WebClient](#) used in applications builds on this basic contract.
- For client and server, [codecs](#) to use to serialize and deserialize HTTP request and response content.

### 1.2.1. [HttpHandler](#)

[HttpHandler](#) is a simple contract with a single method to handle a request and response. It is intentionally minimal, and its main, and only purpose is to be a minimal abstraction over different HTTP server APIs.

The following table describes the supported server APIs:

Server name	Server API used	Reactive Streams support
Netty	Netty API	<a href="#">Reactor Netty</a>
Undertow	Undertow API	spring-web: Undertow to Reactive Streams bridge
Tomcat	Servlet 3.1 non-blocking I/O; Tomcat API to read and write ByteBuffers vs byte[]	spring-web: Servlet 3.1 non-blocking I/O to Reactive Streams bridge
Jetty	Servlet 3.1 non-blocking I/O; Jetty API to write ByteBuffers vs byte[]	spring-web: Servlet 3.1 non-blocking I/O to Reactive Streams bridge

Server name	Server API used	Reactive Streams support
Servlet 3.1 container	Servlet 3.1 non-blocking I/O	spring-web: Servlet 3.1 non-blocking I/O to Reactive Streams bridge

The following table describes server dependencies (also see [supported versions](#)):

Server name	Group id	Artifact name
Reactor Netty	io.projectreactor.netty	reactor-netty
Undertow	io.undertow	undertow-core
Tomcat	org.apache.tomcat.embed	tomcat-embed-core
Jetty	org.eclipse.jetty	jetty-server, jetty-servlet

The code snippets below show using the `HttpHandler` adapters with each server API:

### Reactor Netty

```
HttpHandler handler = ...
ReactorHttpHandlerAdapter adapter = new ReactorHttpHandlerAdapter(handler);
HttpServer.create(host, port).newHandler(adapter).block();
```

### Undertow

```
HttpHandler handler = ...
UndertowHttpHandlerAdapter adapter = new UndertowHttpHandlerAdapter(handler);
Undertow server = Undertow.builder().addHttpListener(port, host).setHandler
(adapter).build();
server.start();
```

### Tomcat

```
HttpHandler handler = ...
Servlet servlet = new TomcatHttpHandlerAdapter(handler);

Tomcat server = new Tomcat();
File base = new File(System.getProperty("java.io.tmpdir"));
Context rootContext = server.addContext("", base.getAbsolutePath());
Tomcat.addServlet(rootContext, "main", servlet);
rootContext.addServletMappingDecoded("/", "main");
server.setHost(host);
server.setPort(port);
server.start();
```

### Jetty

```

HttpHandler handler = ...
Servlet servlet = new JettyHttpHandlerAdapter(handler);

Server server = new Server();
ServletContextHandler contextHandler = new ServletContextHandler(server, "");
contextHandler.addServlet(new ServletHolder(servlet), "/");
contextHandler.start();

ServerConnector connector = new ServerConnector(server);
connector.setHost(host);
connector.setPort(port);
server.addConnector(connector);
server.start();

```

## Servlet 3.1+ Container

To deploy as a WAR to any Servlet 3.1+ container, you can extend and include `AbstractReactiveWebInitializer` in the WAR. That class wraps an `HttpHandler` with `ServletHttpHandlerAdapter` and registers that as a `Servlet`.

### 1.2.2. WebHandler API

The `org.springframework.web.server` package builds on the `HttpHandler` contract to provide a general-purpose web API for processing requests through a chain of multiple `WebExceptionHandler`, multiple `WebFilter`, and a single `WebHandler` component. The chain can be put together with `WebHttpHandlerBuilder` by simply pointing to a Spring `ApplicationContext` where components are `auto-detected`, and/or by registering components with the builder.

While `HttpHandler` has a simple goal to abstract the use of different HTTP servers, the `WebHandler` API aims to provide a broader set of features commonly used in web applications such as:

- User session with attributes.
- Request attributes.
- Resolved `Locale` or `Principal` for the request.
- Access to parsed and cached form data.
- Abstractions for multipart data.
- and more..

## Special bean types

The table below lists the components that `WebHttpHandlerBuilder` can auto-detect in a Spring `ApplicationContext`, or that can be registered directly with it:

Bean name	Bean type	Count	Description
<any>	<code>WebExceptionHandler</code>	0..N	Provide handling for exceptions from the chain of <code>WebFilter</code> instances and the target <code>WebHandler</code> . For more details, see <a href="#">Exceptions</a> .
<any>	<code>WebFilter</code>	0..N	Apply interception style logic to before and after the rest of the filter chain and the target <code>WebHandler</code> . For more details, see <a href="#">Filters</a> .
<code>webHandler</code>	<code>WebHandler</code>	1	The handler for the request.
<code>webSessionManager</code>	<code>WebSessionManager</code>	0..1	The manager for <code>WebSession</code> instances exposed through a method on <code>ServerWebExchange</code> . <code>DefaultWebSessionManager</code> by default.
<code>serverCodecConfigurer</code>	<code>ServerCodecConfigurer</code>	0..1	For access to <code>HttpMessageReader</code> instances for parsing form data and multipart data that is then exposed through methods on <code>ServerWebExchange</code> . <code>ServerCodecConfigurer.create()</code> by default.
<code>localeContextResolver</code>	<code>LocaleContextResolver</code>	0..1	The resolver for <code>LocaleContext</code> exposed through a method on <code>ServerWebExchange</code> . <code>AcceptHeaderLocaleContextResolver</code> by default.
<code>forwardedHeaderTransformer</code>	<code>ForwardedHeaderTransformer</code>	0..1	For processing forwarded type headers, either by extracting and removing them or by removing them only. Not used by default.

## Form Data

`ServerWebExchange` exposes the following method for access to form data:

```
Mono<MultiValueMap<String, String>> getFormData();
```

The `DefaultServerWebExchange` uses the configured `HttpMessageReader` to parse form data (application/x-www-form-urlencoded) into a `MultiValueMap`. By default, `FormHttpMessageReader` is configured for use by the `ServerCodecConfigurer` bean (see the [Web Handler API](#)).

## Multipart Data

[Same as in Spring MVC](#)

`ServerWebExchange` exposes the following method for access to multipart data:



```
Mono<MultiValueMap<String, Part>> getMultipartData();
```

The `DefaultServerWebExchange` uses the configured `HttpMessageReader<MultiValueMap<String, Part>>` to parse `multipart/form-data` content into a `MultiValueMap`. At present, `Synchronoss NIO Multipart` is the only third-party library supported and the only library we know for non-blocking parsing of multipart requests. It is enabled through the `ServerCodecConfigurer` bean (see the [Web Handler API](#)).

To parse multipart data in streaming fashion, you can use the `Flux<Part>` returned from an `HttpMessageReader<Part>` instead. For example, in an annotated controller, use of `@RequestPart` implies `Map`-like access to individual parts by name and, hence, requires parsing multipart data in full. By contrast, you can use `@RequestBody` to decode the content to `Flux<Part>` without collecting to a `MultiValueMap`.

## Forwarded Headers

Same as in Spring MVC

As a request goes through proxies (such as load balancers), the host, port, and scheme may change, and that makes it a challenge, from a client perspective, to create links that point to the correct host, port, and scheme.

[RFC 7239](#) defines the `Forwarded` HTTP header that proxies can use to provide information about the original request. There are other non-standard headers, too, including `X-Forwarded-Host`, `X-Forwarded-Port`, `X-Forwarded-Proto`, `X-Forwarded-Ssl`, and `X-Forwarded-Prefix`.

`ForwardedHeaderTransformer` is a component that modifies the host, port, and scheme of the request, based on forwarded headers, and then removes those headers. You can declare it as a bean with a name of `forwardedHeaderTransformer`, and it is `detected` and used.

There are security considerations for forwarded headers, since an application cannot know if the headers were added by a proxy, as intended, or by a malicious client. This is why a proxy at the boundary of trust should be configured to remove untrusted forwarded traffic coming from the outside. You can also configure the `ForwardedHeaderTransformer` with `removeOnly=true`, in which case it removes but does not use the headers.



In 5.1 `ForwardedHeaderFilter` was deprecated and superseded by `ForwardedHeaderTransformer` so forwarded headers can be processed earlier, before the exchange is created. If the filter is configured anyway, it is taken out of the list of filters, and `ForwardedHeaderTransformer` is used instead.

### 1.2.3. Filters

Same as in Spring MVC

In the [WebHandler API](#), you can use a `WebFilter` to apply interception-style logic before and after the rest of the processing chain of filters and the target `WebHandler`. When using the [WebFlux Config](#), registering a `WebFilter` is as simple as declaring it as a Spring bean and (optionally) expressing



precedence by using `@Order` on the bean declaration or by implementing `Ordered`.

## CORS

Same as in Spring MVC

Spring WebFlux provides fine-grained support for CORS configuration through annotations on controllers. However, when you use it with Spring Security, we advise relying on the built-in `CorsFilter`, which must be ordered ahead of Spring Security's chain of filters.

See the section on [CORS](#) and the [CORS WebFilter](#) for more details.

### 1.2.4. Exceptions

Same as in Spring MVC

In the [WebHandler API](#), you can use a `WebExceptionHandler` to handle exceptions from the chain of `WebFilter` instances and the target `WebHandler`. When using the [WebFlux Config](#), registering a `WebExceptionHandler` is as simple as declaring it as a Spring bean and (optionally) expressing precedence by using `@Order` on the bean declaration or by implementing `Ordered`.

The following table describes the available `WebExceptionHandler` implementations:

Exception Handler	Description
<code>ResponseStatusExceptionHandler</code>	Provides handling for exceptions of type <code>ResponseStatusException</code> by setting the response to the HTTP status code of the exception.
<code>WebFluxResponseStatusExceptionHandler</code>	Extension of <code>ResponseStatusExceptionHandler</code> that can also determine the HTTP status code of a <code>@ResponseStatus</code> annotation on any exception.  This handler is declared in the <a href="#">WebFlux Config</a> .

### 1.2.5. Codecs

Same as in Spring MVC

The `spring-web` and `spring-core` modules provide support for serializing and deserializing byte content to and from higher level objects through non-blocking I/O with Reactive Streams back pressure. The following describes this support:

- `Encoder` and `Decoder` are low level contracts to encode and decode content independent of HTTP.
- `HttpMessageReader` and `HttpMessageWriter` are contracts to encode and decode HTTP message content.
- An `Encoder` can be wrapped with `EncoderHttpMessageWriter` to adapt it for use in a web application, while a `Decoder` can be wrapped with `DecoderHttpMessageReader`.
- `DataBuffer` abstracts different byte buffer representations (e.g. Netty `ByteBuf`, `java.nio.ByteBuffer`, etc.) and is what all codecs work on. See [Data Buffers and Codecs](#) in the "Spring Core" section for more on this topic.

The `spring-core` module provides `byte[]`, `ByteBuffer`, `DataBuffer`, `Resource`, and `String` encoder and decoder implementations. The `spring-web` module provides Jackson JSON, Jackson Smile, JAXB2, Protocol Buffers and other encoders and decoders along with web-only HTTP message reader and writer implementations for form data, multipart content, server-sent events, and others.

`ClientCodecConfigurer` and `ServerCodecConfigurer` are typically used to configure and customize the codecs to use in an application. See the section on configuring [HTTP message codecs](#).

## Jackson JSON

JSON and binary JSON ([Smile](#)) are both supported when the Jackson library is present.

The `Jackson2Decoder` works as follows:

- Jackson's asynchronous, non-blocking parser is used to aggregate a stream of byte chunks into `TokenBuffer`'s each representing a JSON object.
- Each `TokenBuffer` is passed to Jackson's `ObjectMapper` to create a higher level object.
- When decoding to a single-value publisher (e.g. `Mono`), there is one `TokenBuffer`.
- When decoding to a multi-value publisher (e.g. `Flux`), each `TokenBuffer` is passed to the `ObjectMapper` as soon as enough bytes are received for a fully formed object. The input content can be a JSON array, or [line-delimited JSON](#) if the content-type is "application/stream+json".

The `Jackson2Encoder` works as follows:

- For a single value publisher (e.g. `Mono`), simply serialize it through the `ObjectMapper`.
- For a multi-value publisher with "application/json", by default collect the values with `Flux#collectToList()` and then serialize the resulting collection.
- For a multi-value publisher with a streaming media type such as `application/stream+json` or `application/stream+x-jackson-smile`, encode, write, and flush each value individually using a [line-delimited JSON](#) format.
- For SSE the `Jackson2Encoder` is invoked per event and the output is flushed to ensure delivery without delay.



By default both `Jackson2Encoder` and `Jackson2Decoder` do not support elements of type `String`. Instead the default assumption is that a string or a sequence of strings represent serialized JSON content, to be rendered by the `CharSequenceEncoder`. If what you need is to render a JSON array from `Flux<String>`, use `Flux#collectToList()` and encode a `Mono<List<String>>`.

## Form Data

`FormHttpMessageReader` and `FormHttpMessageWriter` support decoding and encoding "application/x-www-form-urlencoded" content.

On the server side where form content often needs to be accessed from multiple places, `ServerWebExchange` provides a dedicated `getFormData()` method that parses the content through `FormHttpMessageReader` and then caches the result for repeated access. See [Form Data](#) in the

[WebHandler API](#) section.

Once `getFormData()` is used, the original raw content can no longer be read from the request body. For this reason, applications are expected to go through `ServerWebExchange` consistently for access to the cached form data versus reading from the raw request body.

## Multipart

`MultipartHttpMessageReader` and `MultipartHttpMessageWriter` support decoding and encoding "multipart/form-data" content. In turn `MultipartHttpMessageReader` delegates to another `HttpMessageReader` for the actual parsing to a `Flux<Part>` and then simply collects the parts into a `MultiValueMap`. At present the [Synchronoss NIO Multipart](#) is used for the actual parsing.

On the server side where multipart form content may need to be accessed from multiple places, `ServerWebExchange` provides a dedicated `getMultipartData()` method that parses the content through `MultipartHttpMessageReader` and then caches the result for repeated access. See [Multipart Data](#) in the [WebHandler API](#) section.

Once `getMultipartData()` is used, the original raw content can no longer be read from the request body. For this reason applications have to consistently use `getMultipartData()` for repeated, map-like access to parts, or otherwise rely on the `SynchronossPartHttpMessageReader` for a one-time access to `Flux<Part>`.

## Limits

`Decoder` and `HttpMessageReader` implementations that buffer some or all of the input stream can be configured with a limit on the maximum number of bytes to buffer in memory. In some cases buffering occurs because input is aggregated and represented as a single object, e.g. controller method with `@RequestBody byte[]`, `x-www-form-urlencoded` data, and so on. Buffering can also occur with streaming, when splitting the input stream, e.g. delimited text, a stream of JSON objects, and so on. For those streaming cases, the limit applies to the number of bytes associated with one object in the stream.

To configure buffer sizes, you can check if a given `Decoder` or `HttpMessageReader` exposes a `maxInMemorySize` property and if so the Javadoc will have details about default values. In WebFlux, the `ServerCodecConfigurer` provides a [single place](#) from where to set all codecs, through the `maxInMemorySize` property for default codecs. On the client side, the limit can be changed in [WebClient.Builder](#).

For [Multipart parsing](#) the `maxInMemorySize` property limits the size of non-file parts. For file parts it determines the threshold at which the part is written to disk. For file parts written to disk, there is an additional `maxDiskUsagePerPart` property to limit the amount of disk space per part. There is also a `maxParts` property to limit the overall number of parts in a multipart request. To configure all 3 in WebFlux, you'll need to supply a pre-configured instance of `MultipartHttpMessageReader` to `ServerCodecConfigurer`.

## Streaming

[Same as in Spring MVC](#)

When streaming to the HTTP response (for example, `text/event-stream`, `application/stream+json`), it is important to send data periodically, in order to reliably detect a disconnected client sooner rather than later. Such a send could be an comment-only, empty SSE event or any other "no-op" data that would effectively serve as a heartbeat.

## `DataBuffer`

`DataBuffer` is the representation for a byte buffer in WebFlux. The Spring Core part of the reference has more on that in the section on [Data Buffers and Codecs](#). The key point to understand is that on some servers like Netty, byte buffers are pooled and reference counted, and must be released when consumed to avoid memory leaks.

WebFlux applications generally do not need to be concerned with such issues, unless they consume or produce data buffers directly, as opposed to relying on codecs to convert to and from higher level objects. Or unless they choose to create custom codecs. For such cases please review the the information in [Data Buffers and Codecs](#), especially the section on [Using DataBuffer](#).

## 1.2.6. Logging

[Same as in Spring MVC](#)

DEBUG level logging in Spring WebFlux is designed to be compact, minimal, and human-friendly. It focuses on high value bits of information that are useful over and over again vs others that are useful only when debugging a specific issue.

TRACE level logging generally follows the same principles as DEBUG (and for example also should not be a firehose) but can be used for debugging any issue. In addition some log messages may show a different level of detail at TRACE vs DEBUG.

Good logging comes from the experience of using the logs. If you spot anything that does not meet the stated goals, please let us know.

### Log Id

In WebFlux, a single request can be executed over multiple threads and the thread ID is not useful for correlating log messages that belong to a specific request. This is why WebFlux log messages are prefixed with a request-specific ID by default.

On the server side, the log ID is stored in the `ServerWebExchange` attribute (`LOG_ID_ATTRIBUTE`), while a fully formatted prefix based on that ID is available from `ServerWebExchange#getLogPrefix()`. On the `WebClient` side, the log ID is stored in the `ClientRequest` attribute (`LOG_ID_ATTRIBUTE`), while a fully formatted prefix is available from `ClientRequest#logPrefix()`.

### Sensitive Data

[Same as in Spring MVC](#)

DEBUG and TRACE logging can log sensitive information. This is why form parameters and headers are masked by default and you must explicitly enable their logging in full.

The following example shows how to do so for server-side requests:

```

@Configuration
@EnableWebFlux
class MyConfig implements WebFluxConfigurer {

    @Override
    public void configureHttpMessageCodecs(ServerCodecConfigurer configurator) {
        configurator.defaultCodecs().enableLoggingRequestDetails(true);
    }
}

```

The following example shows how to do so for client-side requests:

```

Consumer<ClientCodecConfigurer> consumer = configurator ->
    configurator.defaultCodecs().enableLoggingRequestDetails(true);

WebClient webClient = WebClient.builder()
    .exchangeStrategies(strategies -> strategies.codecs(consumer))
    .build();

```

### Custom codecs

Applications can register custom codecs for supporting additional media types, or specific behaviors that are not supported by the default codecs.

Some configuration options expressed by developers are enforced on default codecs. Custom codecs might want to get a chance to align with those preferences, like [enforcing buffering limits](#) or [logging sensitive data](#).

The following example shows how to do so for client-side requests:

```

WebClient webClient = WebClient.builder()
    .codecs(configurator -> {
        CustomDecoder decoder = new CustomDecoder();
        configurator.customCodecs().registerWithDefaultConfig(decoder);
    })
    .build();

```

## 1.3. DispatcherHandler

Same as in Spring MVC

Spring WebFlux, similarly to Spring MVC, is designed around the front controller pattern, where a

central `WebHandler`, the `DispatcherHandler`, provides a shared algorithm for request processing, while actual work is performed by configurable, delegate components. This model is flexible and supports diverse workflows.

`DispatcherHandler` discovers the delegate components it needs from Spring configuration. It is also designed to be a Spring bean itself and implements `ApplicationContextAware` for access to the context in which it runs. If `DispatcherHandler` is declared with a bean name of `webHandler`, it is, in turn, discovered by `WebHttpHandlerBuilder`, which puts together a request-processing chain, as described in [WebHandler API](#).

Spring configuration in a WebFlux application typically contains:

- `DispatcherHandler` with the bean name, `webHandler`
- `WebFilter` and `WebExceptionHandler` beans
- `DispatcherHandler` special beans
- Others

The configuration is given to `WebHttpHandlerBuilder` to build the processing chain, as the following example shows:

```
ApplicationContext context = ...  
Handler handler = WebHttpHandlerBuilder.applicationContext(context);
```

The resulting `Handler` is ready for use with a [server adapter](#).

### 1.3.1. Special Bean Types

[Same as in Spring MVC](#)

The `DispatcherHandler` delegates to special beans to process requests and render the appropriate responses. By “special beans,” we mean Spring-managed `Object` instances that implement WebFlux framework contracts. Those usually come with built-in contracts, but you can customize their properties, extend them, or replace them.

The following table lists the special beans detected by the `DispatcherHandler`. Note that there are also some other beans detected at a lower level (see [Special bean types](#) in the Web Handler API).

Bean type	Explanation
<code>HandlerMapping</code>	<p>Map a request to a handler. The mapping is based on some criteria, the details of which vary by <code>HandlerMapping</code> implementation — annotated controllers, simple URL pattern mappings, and others.</p> <p>The main <code>HandlerMapping</code> implementations are <code>RequestMappingHandlerMapping</code> for <code>@RequestMapping</code> annotated methods, <code>RouterFunctionMapping</code> for functional endpoint routes, and <code>SimpleUrlHandlerMapping</code> for explicit registrations of URI path patterns and <code>WebHandler</code> instances.</p>
<code>HandlerAdapter</code>	<p>Help the <code>DispatcherHandler</code> to invoke a handler mapped to a request regardless of how the handler is actually invoked. For example, invoking an annotated controller requires resolving annotations. The main purpose of a <code>HandlerAdapter</code> is to shield the <code>DispatcherHandler</code> from such details.</p>
<code>HandlerResultHandler</code>	<p>Process the result from the handler invocation and finalize the response. See <a href="#">Result Handling</a>.</p>

### 1.3.2. WebFlux Config

Same as in [Spring MVC](#)

Applications can declare the infrastructure beans (listed under [Web Handler API](#) and `DispatcherHandler`) that are required to process requests. However, in most cases, the [WebFlux Config](#) is the best starting point. It declares the required beans and provides a higher-level configuration callback API to customize it.



Spring Boot relies on the WebFlux config to configure Spring WebFlux and also provides many extra convenient options.

### 1.3.3. Processing

Same as in [Spring MVC](#)

`DispatcherHandler` processes requests as follows:

- Each `HandlerMapping` is asked to find a matching handler, and the first match is used.
- If a handler is found, it is executed through an appropriate `HandlerAdapter`, which exposes the return value from the execution as `HandlerResult`.
- The `HandlerResult` is given to an appropriate `HandlerResultHandler` to complete processing by writing to the response directly or by using a view to render.

### 1.3.4. Result Handling

The return value from the invocation of a handler, through a `HandlerAdapter`, is wrapped as a `HandlerResult`, along with some additional context, and passed to the first `HandlerResultHandler` that claims support for it. The following table shows the available `HandlerResultHandler`



implementations, all of which are declared in the [WebFlux Config](#):

Result Handler Type	Return Values	Default Order
<a href="#">ResponseEntityResultHandler</a>	<a href="#">ResponseEntity</a> , typically from <a href="#">@Controller</a> instances.	0
<a href="#">ServerResponseResultHandler</a>	<a href="#">ServerResponse</a> , typically from functional endpoints.	0
<a href="#">ResponseBodyResultHandler</a>	Handle return values from <a href="#">@ResponseBody</a> methods or <a href="#">@RestController</a> classes.	100
<a href="#">ViewResolutionResultHandler</a>	<a href="#">CharSequence</a> , <a href="#">View</a> , <a href="#">Model</a> , <a href="#">Map</a> , <a href="#">Rendering</a> , or any other <a href="#">Object</a> is treated as a model attribute.  See also <a href="#">View Resolution</a> .	<a href="#">Integer.MAX_VALUE</a>

### 1.3.5. Exceptions

[Same as in Spring MVC](#)

The [HandlerResult](#) returned from a [HandlerAdapter](#) can expose a function for error handling based on some handler-specific mechanism. This error function is called if:

- The handler (for example, [@Controller](#)) invocation fails.
- The handling of the handler return value through a [HandlerResultHandler](#) fails.

The error function can change the response (for example, to an error status), as long as an error signal occurs before the reactive type returned from the handler produces any data items.

This is how [@ExceptionHandler](#) methods in [@Controller](#) classes are supported. By contrast, support for the same in Spring MVC is built on a [HandlerExceptionResolver](#). This generally should not matter. However, keep in mind that, in WebFlux, you cannot use a [@ControllerAdvice](#) to handle exceptions that occur before a handler is chosen.

See also [Managing Exceptions](#) in the “Annotated Controller” section or [Exceptions](#) in the WebHandler API section.

### 1.3.6. View Resolution

[Same as in Spring MVC](#)

View resolution enables rendering to a browser with an HTML template and a model without tying you to a specific view technology. In Spring WebFlux, view resolution is supported through a dedicated [HandlerResultHandler](#) that uses [ViewResolver](#) instances to map a String (representing a logical view name) to a [View](#) instance. The [View](#) is then used to render the response.

#### Handling

[Same as in Spring MVC](#)

The [HandlerResult](#) passed into [ViewResolutionResultHandler](#) contains the return value from the



handler and the model that contains attributes added during request handling. The return value is processed as one of the following:

- **String, CharSequence**: A logical view name to be resolved to a **View** through the list of configured **ViewResolver** implementations.
- **void**: Select a default view name based on the request path, minus the leading and trailing slash, and resolve it to a **View**. The same also happens when a view name was not provided (for example, model attribute was returned) or an async return value (for example, **Mono** completed empty).
- **Rendering**: API for view resolution scenarios. Explore the options in your IDE with code completion.
- **Model, Map**: Extra model attributes to be added to the model for the request.
- Any other: Any other return value (except for simple types, as determined by **BeanUtils#isSimpleProperty**) is treated as a model attribute to be added to the model. The attribute name is derived from the class name by using **conventions**, unless a handler method **@ModelAttribute** annotation is present.

The model can contain asynchronous, reactive types (for example, from Reactor or RxJava). Prior to rendering, **AbstractView** resolves such model attributes into concrete values and updates the model. Single-value reactive types are resolved to a single value or no value (if empty), while multi-value reactive types (for example, **Flux<T>**) are collected and resolved to **List<T>**.

To configure view resolution is as simple as adding a **ViewResolutionResultHandler** bean to your Spring configuration. **WebFlux Config** provides a dedicated configuration API for view resolution.

See [View Technologies](#) for more on the view technologies integrated with Spring WebFlux.

## Redirecting

Same as in Spring MVC

The special **redirect:** prefix in a view name lets you perform a redirect. The **UrlBasedViewResolver** (and sub-classes) recognize this as an instruction that a redirect is needed. The rest of the view name is the redirect URL.

The net effect is the same as if the controller had returned a **RedirectView** or **Rendering.redirectTo("abc").build()**, but now the controller itself can operate in terms of logical view names. A view name such as **redirect:/some/resource** is relative to the current application, while a view name such as **redirect:https://example.com/arbitrary/path** redirects to an absolute URL.

## Content Negotiation

Same as in Spring MVC

**ViewResolutionResultHandler** supports content negotiation. It compares the request media types with the media types supported by each selected **View**. The first **View** that supports the requested media type(s) is used.

In order to support media types such as JSON and XML, Spring WebFlux provides `HttpMessageWriterView`, which is a special `View` that renders through an `HttpMessageWriter`. Typically, you would configure these as default views through the [WebFlux Configuration](#). Default views are always selected and used if they match the requested media type.

## 1.4. Annotated Controllers

Same as in [Spring MVC](#)

Spring WebFlux provides an annotation-based programming model, where `@Controller` and `@RestController` components use annotations to express request mappings, request input, handle exceptions, and more. Annotated controllers have flexible method signatures and do not have to extend base classes nor implement specific interfaces.

The following listing shows a basic example:

```
@RestController
public class HelloController {

    @GetMapping("/hello")
    public String handle() {
        return "Hello WebFlux";
    }
}
```

In the preceding example, the method returns a `String` to be written to the response body.

### 1.4.1. `@Controller`

Same as in [Spring MVC](#)

You can define controller beans by using a standard Spring bean definition. The `@Controller` stereotype allows for auto-detection and is aligned with Spring general support for detecting `@Component` classes in the classpath and auto-registering bean definitions for them. It also acts as a stereotype for the annotated class, indicating its role as a web component.

To enable auto-detection of such `@Controller` beans, you can add component scanning to your Java configuration, as the following example shows:

```
@Configuration
@ComponentScan("org.example.web") ①
public class WebConfig {

    // ...

}
```

① Scan the `org.example.web` package.

`@RestController` is a [composed annotation](#) that is itself meta-annotated with `@Controller` and `@ResponseBody`, indicating a controller whose every method inherits the type-level `@ResponseBody` annotation and, therefore, writes directly to the response body versus view resolution and rendering with an HTML template.

### 1.4.2. Request Mapping

Same as in Spring MVC

The `@RequestMapping` annotation is used to map requests to controllers methods. It has various attributes to match by URL, HTTP method, request parameters, headers, and media types. You can use it at the class level to express shared mappings or at the method level to narrow down to a specific endpoint mapping.

There are also HTTP method specific shortcut variants of `@RequestMapping`:

- `@GetMapping`
- `@PostMapping`
- `@PutMapping`
- `@DeleteMapping`
- `@PatchMapping`

The preceding annotations are [Custom Annotations](#) that are provided because, arguably, most controller methods should be mapped to a specific HTTP method versus using `@RequestMapping`, which, by default, matches to all HTTP methods. At the same time, a `@RequestMapping` is still needed at the class level to express shared mappings.

The following example uses type and method level mappings:

```

@RestController
@RequestMapping("/persons")
class PersonController {

    @GetMapping("/{id}")
    public Person getPerson(@PathVariable Long id) {
        // ...
    }

    @PostMapping
    @ResponseStatus(HttpStatus.CREATED)
    public void add(@RequestBody Person person) {
        // ...
    }
}

```

## URI Patterns

Same as in Spring MVC

You can map requests by using glob patterns and wildcards:

- `?` matches one character
- `*` matches zero or more characters within a path segment
- `**` match zero or more path segments

You can also declare URI variables and access their values with `@PathVariable`, as the following example shows:

```

@GetMapping("/owners/{ownerId}/pets/{petId}")
public Pet findPet(@PathVariable Long ownerId, @PathVariable Long petId) {
    // ...
}

```

You can declare URI variables at the class and method levels, as the following example shows:

```

@Controller
@RequestMapping("/owners/{ownerId}") ①
public class OwnerController {

    @GetMapping("/pets/{petId}") ②
    public Pet findPet(@PathVariable Long ownerId, @PathVariable Long petId) {
        // ...
    }
}

```

① Class-level URI mapping.

② Method-level URI mapping.

URI variables are automatically converted to the appropriate type or a `TypeMismatchException` is raised. Simple types (`int`, `long`, `Date`, and so on) are supported by default and you can register support for any other data type. See [Type Conversion](#) and [DataBinder](#).

URI variables can be named explicitly (for example, `@PathVariable("customId")`), but you can leave that detail out if the names are the same and you compile your code with debugging information or with the `-parameters` compiler flag on Java 8.

The syntax `{*varName}` declares a URI variable that matches zero or more remaining path segments. For example `/resources/{*path}` matches all files `/resources/` and the `"path"` variable captures the complete relative path.

The syntax `{varName:regex}` declares a URI variable with a regular expression that has the syntax: `{varName:regex}`. For example, given a URL of `/spring-web-3.0.5.jar`, the following method extracts the name, version, and file extension:

```

@GetMapping("/{name:[a-z-]+}-{version:\\d\\.\\d\\.\\d}{ext:\\.[a-z]+}")
public void handle(@PathVariable String version, @PathVariable String ext) {
    // ...
}

```

URI path patterns can also have embedded `${...}` placeholders that are resolved on startup through [PropertyPlaceholderConfigurer](#) against local, system, environment, and other property sources. You can use this to, for example, parameterize a base URL based on some external configuration.



Spring WebFlux uses [PathPattern](#) and the [PathPatternParser](#) for URI path matching support. Both classes are located in `spring-web` and are expressly designed for use with HTTP URL paths in web applications where a large number of URI path patterns are matched at runtime.

Spring WebFlux does not support suffix pattern matching — unlike Spring MVC, where a mapping

such as `/person` also matches to `/person.*`. For URL-based content negotiation, if needed, we recommend using a query parameter, which is simpler, more explicit, and less vulnerable to URL path based exploits.

## Pattern Comparison

[Same as in Spring MVC](#)

When multiple patterns match a URL, they must be compared to find the best match. This is done with `PathPattern.SPECIFICITY_COMPARATOR`, which looks for patterns that are more specific.

For every pattern, a score is computed, based on the number of URI variables and wildcards, where a URI variable scores lower than a wildcard. A pattern with a lower total score wins. If two patterns have the same score, the longer is chosen.

Catch-all patterns (for example, `**`, `{*varName}`) are excluded from the scoring and are always sorted last instead. If two patterns are both catch-all, the longer is chosen.

## Consumable Media Types

[Same as in Spring MVC](#)

You can narrow the request mapping based on the `Content-Type` of the request, as the following example shows:

```
@PostMapping(path = "/pets", consumes = "application/json")
public void addPet(@RequestBody Pet pet) {
    // ...
}
```

The `consumes` attribute also supports negation expressions—for example, `!text/plain` means any content type other than `text/plain`.

You can declare a shared `consumes` attribute at the class level. Unlike most other request mapping attributes, however, when used at the class level, a method-level `consumes` attribute overrides rather than extends the class-level declaration.



`MediaType` provides constants for commonly used media types—for example, `APPLICATION_JSON_VALUE` and `APPLICATION_XML_VALUE`.

## Producible Media Types

[Same as in Spring MVC](#)

You can narrow the request mapping based on the `Accept` request header and the list of content types that a controller method produces, as the following example shows:

```
@GetMapping(path = "/pets/{petId}", produces = "application/json;charset=UTF-8")
@ResponseBody
public Pet getPet(@PathVariable String petId) {
    // ...
}
```

The media type can specify a character set. Negated expressions are supported—for example, `!text/plain` means any content type other than `text/plain`.



For JSON content type, you should specify the UTF-8 `charset` even if [RFC7159](#) clearly states that “no charset parameter is defined for this registration,” because some browsers require it to correctly interpret UTF-8 special characters.

You can declare a shared `produces` attribute at the class level. Unlike most other request mapping attributes, however, when used at the class level, a method-level `produces` attribute overrides rather than extend the class level declaration.



`MediaType` provides constants for commonly used media types—e.g. `APPLICATION_JSON_UTF8_VALUE`, `APPLICATION_XML_VALUE`.

## Parameters and Headers

Same as in [Spring MVC](#)

You can narrow request mappings based on query parameter conditions. You can test for the presence of a query parameter (`myParam`), for its absence (`!myParam`), or for a specific value (`myParam=myValue`). The following examples tests for a parameter with a value:

```
@GetMapping(path = "/pets/{petId}", params = "myParam=myValue") ①
public void findPet(@PathVariable String petId) {
    // ...
}
```

① Check that `myParam` equals `myValue`.

You can also use the same with request header conditions, as the following example shows:

```
@GetMapping(path = "/pets", headers = "myHeader=myValue") ①
public void findPet(@PathVariable String petId) {
    // ...
}
```

① Check that `myHeader` equals `myValue`.

## HTTP HEAD, OPTIONS

Same as in Spring MVC

`@GetMapping` and `@RequestMapping(method=HttpMethod.GET)` support HTTP HEAD transparently for request mapping purposes. Controller methods need not change. A response wrapper, applied in the `Handler` server adapter, ensures a `Content-Length` header is set to the number of bytes written without actually writing to the response.

By default, HTTP OPTIONS is handled by setting the `Allow` response header to the list of HTTP methods listed in all `@RequestMapping` methods with matching URL patterns.

For a `@RequestMapping` without HTTP method declarations, the `Allow` header is set to `GET,HEAD,POST,PUT,PATCH,DELETE,OPTIONS`. Controller methods should always declare the supported HTTP methods (for example, by using the HTTP method specific variants—`@GetMapping`, `@PostMapping`, and others).

You can explicitly map a `@RequestMapping` method to HTTP HEAD and HTTP OPTIONS, but that is not necessary in the common case.

## Custom Annotations

Same as in Spring MVC

Spring WebFlux supports the use of [composed annotations](#) for request mapping. Those are annotations that are themselves meta-annotated with `@RequestMapping` and composed to redeclare a subset (or all) of the `@RequestMapping` attributes with a narrower, more specific purpose.

`@GetMapping`, `@PostMapping`, `@PutMapping`, `@DeleteMapping`, and `@PatchMapping` are examples of composed annotations. They are provided, because, arguably, most controller methods should be mapped to a specific HTTP method versus using `@RequestMapping`, which, by default, matches to all HTTP methods. If you need an example of composed annotations, look at how those are declared.

Spring WebFlux also supports custom request mapping attributes with custom request matching logic. This is a more advanced option that requires sub-classing `RequestMappingHandlerMapping` and overriding the `getCustomMethodCondition` method, where you can check the custom attribute and return your own `RequestCondition`.

## Explicit Registrations

Same as in Spring MVC



You can programmatically register Handler methods, which can be used for dynamic registrations or for advanced cases, such as different instances of the same handler under different URLs. The following example shows how to do so:

```
@Configuration
public class MyConfig {

    @Autowired
    public void setHandlerMapping(RequestMappingHandlerMapping mapping,
        UserHandler handler) ❶
        throws NoSuchMethodException {

        RequestMappingInfo info = RequestMappingInfo
            .paths("/user/{id}").methods(RequestMethod.GET).build(); ❷

        Method method = UserHandler.class.getMethod("getUser", Long.class); ❸

        mapping.registerMapping(info, handler, method); ❹
    }
}
```

- ❶ Inject target handlers and the handler mapping for controllers.
- ❷ Prepare the request mapping metadata.
- ❸ Get the handler method.
- ❹ Add the registration.

### 1.4.3. Handler Methods

Same as in Spring MVC

`@RequestMapping` handler methods have a flexible signature and can choose from a range of supported controller method arguments and return values.

#### Method Arguments

Same as in Spring MVC

The following table shows the supported controller method arguments.

Reactive types (Reactor, RxJava, or other) are supported on arguments that require blocking I/O (for example, reading the request body) to be resolved. This is marked in the Description column. Reactive types are not expected on arguments that do not require blocking.

JDK 1.8's `java.util.Optional` is supported as a method argument in combination with annotations that have a `required` attribute (for example, `@RequestParam`, `@RequestHeader`, and others) and is equivalent to `required=false`.

Controller method argument	Description
<code>ServerWebExchange</code>	Access to the full <code>ServerWebExchange</code> — container for the HTTP request and response, request and session attributes, <code>checkNotModified</code> methods, and others.
<code>ServerHttpRequest</code> , <code>ServerHttpResponse</code>	Access to the HTTP request or response.
<code>WebSession</code>	Access to the session. This does not force the start of a new session unless attributes are added. Supports reactive types.
<code>java.security.Principal</code>	The currently authenticated user — possibly a specific <code>Principal</code> implementation class if known. Supports reactive types.
<code>org.springframework.http.HttpMethod</code>	The HTTP method of the request.
<code>java.util.Locale</code>	The current request locale, determined by the most specific <code>LocaleResolver</code> available — in effect, the configured <code>LocaleResolver/LocaleContextResolver</code> .
<code>java.util.TimeZone</code> + <code>java.time.ZoneId</code>	The time zone associated with the current request, as determined by a <code>LocaleContextResolver</code> .
<code>@PathVariable</code>	For access to URI template variables. See <a href="#">URI Patterns</a> .
<code>@MatrixVariable</code>	For access to name-value pairs in URI path segments. See <a href="#">Matrix Variables</a> .
<code>@RequestParam</code>	For access to Servlet request parameters. Parameter values are converted to the declared method argument type. See <code>@RequestParam</code> .  Note that use of <code>@RequestParam</code> is optional — for example, to set its attributes. See “Any other argument” later in this table.
<code>@RequestHeader</code>	For access to request headers. Header values are converted to the declared method argument type. See <code>@RequestHeader</code> .
<code>@CookieValue</code>	For access to cookies. Cookie values are converted to the declared method argument type. See <code>@CookieValue</code> .
<code>@RequestBody</code>	For access to the HTTP request body. Body content is converted to the declared method argument type by using <code>HttpMessageReader</code> instances. Supports reactive types. See <code>@RequestBody</code> .
<code>HttpEntity&lt;B&gt;</code>	For access to request headers and body. The body is converted with <code>HttpMessageReader</code> instances. Supports reactive types. See <code>HttpEntity</code> .
<code>@RequestPart</code>	For access to a part in a <code>multipart/form-data</code> request. Supports reactive types. See <a href="#">Multipart Content</a> and <a href="#">Multipart Data</a> .
<code>java.util.Map</code> , <code>org.springframework.ui.Model</code> , and <code>org.springframework.ui.ModelMap</code>	For access to the model that is used in HTML controllers and is exposed to templates as part of view rendering.

Controller method argument	Description
<code>@ModelAttribute</code>	<p>For access to an existing attribute in the model (instantiated if not present) with data binding and validation applied. See <code>@ModelAttribute</code> as well as <code>Model</code> and <code>DataBinder</code>.</p> <p>Note that use of <code>@ModelAttribute</code> is optional — for example, to set its attributes. See “Any other argument” later in this table.</p>
<code>Errors</code> , <code>BindingResult</code>	For access to errors from validation and data binding for a command object, i.e. a <code>@ModelAttribute</code> argument. An <code>Errors</code> , or <code>BindingResult</code> argument must be declared immediately after the validated method argument.
<code>SessionStatus</code> + class-level <code>@SessionAttributes</code>	For marking form processing complete, which triggers cleanup of session attributes declared through a class-level <code>@SessionAttributes</code> annotation. See <code>@SessionAttributes</code> for more details.
<code>UriComponentsBuilder</code>	For preparing a URL relative to the current request’s host, port, scheme, and path. See <a href="#">URI Links</a> .
<code>@SessionAttribute</code>	For access to any session attribute — in contrast to model attributes stored in the session as a result of a class-level <code>@SessionAttributes</code> declaration. See <code>@SessionAttribute</code> for more details.
<code>@RequestAttribute</code>	For access to request attributes. See <code>@RequestAttribute</code> for more details.
Any other argument	If a method argument is not matched to any of the above, it is, by default, resolved as a <code>@RequestParam</code> if it is a simple type, as determined by <code>BeanUtils#isSimpleProperty</code> , or as a <code>@ModelAttribute</code> , otherwise.

## Return Values

Same as in [Spring MVC](#)

The following table shows the supported controller method return values. Note that reactive types from libraries such as Reactor, RxJava, [or other](#) are generally supported for all return values.

Controller method return value	Description
<code>@ResponseBody</code>	The return value is encoded through <code>HttpMessageWriter</code> instances and written to the response. See <code>@ResponseBody</code> .
<code>HttpEntity&lt;B&gt;</code> , <code>ResponseEntity&lt;B&gt;</code>	The return value specifies the full response, including HTTP headers, and the body is encoded through <code>HttpMessageWriter</code> instances and written to the response. See <code>ResponseEntity</code> .
<code>HttpHeaders</code>	For returning a response with headers and no body.

Controller method return value	Description
<code>String</code>	A view name to be resolved with <code>ViewResolver</code> instances and used together with the implicit model — determined through command objects and <code>@ModelAttribute</code> methods. The handler method can also programmatically enrich the model by declaring a <code>Model</code> argument (described <a href="#">earlier</a> ).
<code>View</code>	A <code>View</code> instance to use for rendering together with the implicit model — determined through command objects and <code>@ModelAttribute</code> methods. The handler method can also programmatically enrich the model by declaring a <code>Model</code> argument (described <a href="#">earlier</a> ).
<code>java.util.Map</code> , <code>org.springframework.ui.Model</code>	Attributes to be added to the implicit model, with the view name implicitly determined based on the request path.
<code>@ModelAttribute</code>	An attribute to be added to the model, with the view name implicitly determined based on the request path.  Note that <code>@ModelAttribute</code> is optional. See “Any other return value” later in this table.
<code>Rendering</code>	An API for model and view rendering scenarios.
<code>void</code>	A method with a <code>void</code> , possibly asynchronous (for example, <code>Mono&lt;Void&gt;</code> ), return type (or a <code>null</code> return value) is considered to have fully handled the response if it also has a <code>ServerHttpResponse</code> , a <code>ServerWebExchange</code> argument, or an <code>@ResponseStatus</code> annotation. The same is also true if the controller has made a positive ETag or <code>lastModified</code> timestamp check. // TODO: See <a href="#">Controllers</a> for details.  If none of the above is true, a <code>void</code> return type can also indicate “no response body” for REST controllers or default view name selection for HTML controllers.
<code>Flux&lt;ServerSentEvent&gt;</code> , <code>Observable&lt;ServerSentEvent&gt;</code> , or other reactive type	Emit server-sent events. The <code>ServerSentEvent</code> wrapper can be omitted when only data needs to be written (however, <code>text/event-stream</code> must be requested or declared in the mapping through the <code>produces</code> attribute).
Any other return value	If a return value is not matched to any of the above, it is, by default, treated as a view name, if it is <code>String</code> or <code>void</code> (default view name selection applies), or as a model attribute to be added to the model, unless it is a simple type, as determined by <a href="#">BeanUtils#isSimpleProperty</a> , in which case it remains unresolved.

## Type Conversion

### Same as in Spring MVC

Some annotated controller method arguments that represent String-based request input (for example, `@RequestParam`, `@RequestHeader`, `@PathVariable`, `@MatrixVariable`, and `@CookieValue`) can require type conversion if the argument is declared as something other than `String`.

For such cases, type conversion is automatically applied based on the configured converters. By default, simple types (such as `int`, `long`, `Date`, and others) are supported. Type conversion can be customized through a `WebDataBinder` (see [\[mvc-ann-initbinder\]](#)) or by registering `Formatters` with the `FormattingConversionService` (see [Spring Field Formatting](#)).

## Matrix Variables

[Same as in Spring MVC](#)

[RFC 3986](#) discusses name-value pairs in path segments. In Spring WebFlux, we refer to those as “matrix variables” based on an “[old post](#)” by Tim Berners-Lee, but they can also be referred to as URI path parameters.

Matrix variables can appear in any path segment, with each variable separated by a semicolon and multiple values separated by commas—for example, `/cars;color=red,green;year=2012`. Multiple values can also be specified through repeated variable names—for example, `color=red;color=green;color=blue`.

Unlike Spring MVC, in WebFlux, the presence or absence of matrix variables in a URL does not affect request mappings. In other words, you are not required to use a URI variable to mask variable content. That said, if you want to access matrix variables from a controller method, you need to add a URI variable to the path segment where matrix variables are expected. The following example shows how to do so:

```
// GET /pets/42;q=11;r=22

@GetMapping("/pets/{petId}")
public void findPet(@PathVariable String petId, @MatrixVariable int q) {

    // petId == 42
    // q == 11
}
```

Given that all path segments can contain matrix variables, you may sometimes need to disambiguate which path variable the matrix variable is expected to be in, as the following example shows:

```
// GET /owners/42;q=11/pets/21;q=22

@GetMapping("/owners/{ownerId}/pets/{petId}")
public void findPet(
    @MatrixVariable(name="q", pathVar="ownerId") int q1,
    @MatrixVariable(name="q", pathVar="petId") int q2) {

    // q1 == 11
    // q2 == 22
}
```

You can define a matrix variable may be defined as optional and specify a default value as the following example shows:

```
// GET /pets/42

@GetMapping("/pets/{petId}")
public void findPet(@MatrixVariable(required=false, defaultValue="1") int q) {

    // q == 1
}
```

To get all matrix variables, use a **MultiValueMap**, as the following example shows:

```
// GET /owners/42;q=11;r=12/pets/21;q=22;s=23

@GetMapping("/owners/{ownerId}/pets/{petId}")
public void findPet(
    @MatrixVariable MultiValueMap<String, String> matrixVars,
    @MatrixVariable(pathVar="petId") MultiValueMap<String, String>
    petMatrixVars) {

    // matrixVars: ["q" : [11,22], "r" : 12, "s" : 23]
    // petMatrixVars: ["q" : 22, "s" : 23]
}
```

## @RequestParam

Same as in Spring MVC

You can use the **@RequestParam** annotation to bind query parameters to a method argument in a controller. The following code snippet shows the usage:

```

@Controller
@RequestMapping("/pets")
public class EditPetForm {

    // ...

    @GetMapping
    public String setupForm(@RequestParam("petId") int petId, Model model) { ①
        Pet pet = this.clinic.loadPet(petId);
        model.addAttribute("pet", pet);
        return "petForm";
    }

    // ...

}

```

① Using `@RequestParam`.



The Servlet API “request parameter” concept conflates query parameters, form data, and multipart into one. However, in WebFlux, each is accessed individually through `ServerWebExchange`. While `@RequestParam` binds to query parameters only, you can use data binding to apply query parameters, form data, and multipart to a [command object](#).

Method parameters that use the `@RequestParam` annotation are required by default, but you can specify that a method parameter is optional by setting the required flag of a `@RequestParam` to `false` or by declaring the argument with a `java.util.Optional` wrapper.

Type conversion is applied automatically if the target method parameter type is not `String`. See [\[mvc-ann-typeconversion\]](#).

When a `@RequestParam` annotation is declared on a `Map<String, String>` or `MultiValueMap<String, String>` argument, the map is populated with all query parameters.

Note that use of `@RequestParam` is optional—for example, to set its attributes. By default, any argument that is a simple value type (as determined by `BeanUtils#isSimpleProperty`) and is not resolved by any other argument resolver is treated as if it were annotated with `@RequestParam`.

`@RequestHeader`

[Same as in Spring MVC](#)

You can use the `@RequestHeader` annotation to bind a request header to a method argument in a controller.

The following example shows a request with headers:

Host	localhost:8080
Accept	text/html,application/xhtml+xml,application/xml;q=0.9
Accept-Language	fr,en-gb;q=0.7,en;q=0.3
Accept-Encoding	gzip,deflate
Accept-Charset	ISO-8859-1,utf-8;q=0.7,*;q=0.7
Keep-Alive	300

The following example gets the value of the `Accept-Encoding` and `Keep-Alive` headers:

```
@GetMapping("/demo")
public void handle(
    @RequestHeader("Accept-Encoding") String encoding, ①
    @RequestHeader("Keep-Alive") long keepAlive) { ②
    //...
}
```

① Get the value of the `Accept-Encoding` header.

② Get the value of the `Keep-Alive` header.

Type conversion is applied automatically if the target method parameter type is not `String`. See [\[mvc-ann-typeconversion\]](#).

When a `@RequestHeader` annotation is used on a `Map<String, String>`, `MultiValueMap<String, String>`, or `HttpHeaders` argument, the map is populated with all header values.



Built-in support is available for converting a comma-separated string into an array or collection of strings or other types known to the type conversion system. For example, a method parameter annotated with `@RequestHeader("Accept")` may be of type `String` but also of `String[]` or `List<String>`.

## `@CookieValue`

Same as in Spring MVC

You can use the `@CookieValue` annotation to bind the value of an HTTP cookie to a method argument in a controller.

The following example shows a request with a cookie:

```
JSESSIONID=415A4AC178C59DACE0B2C9CA727CDD84
```

The following code sample demonstrates how to get the cookie value:



```
@GetMapping("/demo")
public void handle(@CookieValue("JSESSIONID") String cookie) { ①
    //...
}
```

① Get the cookie value.

Type conversion is applied automatically if the target method parameter type is not `String`. See [\[mvc-ann-typeconversion\]](#).

### `@ModelAttribute`

Same as in Spring MVC

You can use the `@ModelAttribute` annotation on a method argument to access an attribute from the model or have it instantiated if not present. The model attribute is also overlain with the values of query parameters and form fields whose names match to field names. This is referred to as data binding, and it saves you from having to deal with parsing and converting individual query parameters and form fields. The following example binds an instance of `Pet`:

```
@PostMapping("/owners/{ownerId}/pets/{petId}/edit")
public String processSubmit(@ModelAttribute Pet pet) { } ①
```

① Bind an instance of `Pet`.

The `Pet` instance in the preceding example is resolved as follows:

- From the model if already added through `Model`.
- From the HTTP session through `@SessionAttributes`.
- From the invocation of a default constructor.
- From the invocation of a “primary constructor” with arguments that match query parameters or form fields. Argument names are determined through JavaBeans `@ConstructorProperties` or through runtime-retained parameter names in the bytecode.

After the model attribute instance is obtained, data binding is applied. The `WebExchangeDataBinder` class matches names of query parameters and form fields to field names on the target `Object`. Matching fields are populated after type conversion is applied where necessary. For more on data binding (and validation), see [Validation](#). For more on customizing data binding, see [DataBinder](#).

Data binding can result in errors. By default, a `WebExchangeBindException` is raised, but, to check for such errors in the controller method, you can add a `BindingResult` argument immediately next to the `@ModelAttribute`, as the following example shows:

```

@PostMapping("/owners/{ownerId}/pets/{petId}/edit")
public String processSubmit(@ModelAttribute("pet") Pet pet, BindingResult result)
{ ❶
    if (result.hasErrors()) {
        return "petForm";
    }
    // ...
}

```

❶ Adding a `BindingResult`.

You can automatically apply validation after data binding by adding the `javax.validation.Valid` annotation or Spring's `@Validated` annotation (see also [Bean Validation](#) and [Spring validation](#)). The following example uses the `@Valid` annotation:

```

@PostMapping("/owners/{ownerId}/pets/{petId}/edit")
public String processSubmit(@Valid @ModelAttribute("pet") Pet pet, BindingResult
result) { ❶
    if (result.hasErrors()) {
        return "petForm";
    }
    // ...
}

```

❶ Using `@Valid` on a model attribute argument.

Spring WebFlux, unlike Spring MVC, supports reactive types in the model—for example, `Mono<Account>` or `io.reactivex.Single<Account>`. You can declare a `@ModelAttribute` argument with or without a reactive type wrapper, and it will be resolved accordingly, to the actual value if necessary. However, note that, to use a `BindingResult` argument, you must declare the `@ModelAttribute` argument before it without a reactive type wrapper, as shown earlier. Alternatively, you can handle any errors through the reactive type, as the following example shows:

```

@PostMapping("/owners/{ownerId}/pets/{petId}/edit")
public Mono<String> processSubmit(@Valid @ModelAttribute("pet") Mono<Pet> petMono)
{
    return petMono
        .flatMap(pet -> {
            // ...
        })
        .onErrorResume(ex -> {
            // ...
        });
}

```

Note that use of `@ModelAttribute` is optional—for example, to set its attributes. By default, any argument that is not a simple value type( as determined by [BeanUtils#isSimpleProperty](#)) and is not resolved by any other argument resolver is treated as if it were annotated with `@ModelAttribute`.

### `@SessionAttributes`

Same as in Spring MVC

`@SessionAttributes` is used to store model attributes in the `WebSession` between requests. It is a type-level annotation that declares session attributes used by a specific controller. This typically lists the names of model attributes or types of model attributes that should be transparently stored in the session for subsequent requests to access.

Consider the following example:

```

@Controller
@SessionAttributes("pet") ①
public class EditPetForm {
    // ...
}

```

① Using the `@SessionAttributes` annotation.

On the first request, when a model attribute with the name, `pet`, is added to the model, it is automatically promoted to and saved in the `WebSession`. It remains there until another controller method uses a `SessionStatus` method argument to clear the storage, as the following example shows:

```

@Controller
@SessionAttributes("pet") ①
public class EditPetForm {

    // ...

    @PostMapping("/pets/{id}")
    public String handle(Pet pet, BindingResult errors, SessionStatus status) { ②
        if (errors.hasErrors) {
            // ...
        }
        status.setComplete();
        // ...
    }
}

```

① Using the `@SessionAttributes` annotation.

② Using a `SessionStatus` variable.

### `@SessionAttribute`

Same as in Spring MVC

If you need access to pre-existing session attributes that are managed globally (that is, outside the controller—for example, by a filter) and may or may not be present, you can use the `@SessionAttribute` annotation on a method parameter, as the following example shows:

```

@GetMapping("/")
public String handle(@SessionAttribute User user) { ①
    // ...
}

```

① Using `@SessionAttribute`.

For use cases that require adding or removing session attributes, consider injecting `WebSession` into the controller method.

For temporary storage of model attributes in the session as part of a controller workflow, consider using `SessionAttributes`, as described in `@SessionAttributes`.

### `@RequestAttribute`

Same as in Spring MVC

Similarly to `@SessionAttribute`, you can use the `@RequestAttribute` annotation to access pre-existing

request attributes created earlier (for example, by a [WebFilter](#)), as the following example shows:

```
@GetMapping("/")
public String handle(@RequestAttribute Client client) { ❶
    // ...
}
```

❶ Using [@RequestAttribute](#).

## Multipart Content

Same as in [Spring MVC](#)

As explained in [Multipart Data](#), [ServerWebExchange](#) provides access to multipart content. The best way to handle a file upload form (for example, from a browser) in a controller is through data binding to a [command object](#), as the following example shows:

```
class MyForm {

    private String name;

    private MultipartFile file;

    // ...
}

@Controller
public class FileUploadController {

    @PostMapping("/form")
    public String handleFormUpload(MyForm form, BindingResult errors) {
        // ...
    }
}
```

You can also submit multipart requests from non-browser clients in a RESTful service scenario. The following example uses a file along with JSON:

```

POST /someUrl
Content-Type: multipart/mixed

--edt7Tfrdusa7r3lNQc79vXuhIIMlatb7PQg7Vp
Content-Disposition: form-data; name="meta-data"
Content-Type: application/json; charset=UTF-8
Content-Transfer-Encoding: 8bit

{
    "name": "value"
}
--edt7Tfrdusa7r3lNQc79vXuhIIMlatb7PQg7Vp
Content-Disposition: form-data; name="file-data"; filename="file.properties"
Content-Type: text/xml
Content-Transfer-Encoding: 8bit
... File Data ...

```

You can access individual parts with `@RequestPart`, as the following example shows:

```

@PostMapping("/")
public String handle(@RequestPart("meta-data") Part metadata, ①
                    @RequestPart("file-data") FilePart file) { ②
    // ...
}

```

① Using `@RequestPart` to get the metadata.

② Using `@RequestPart` to get the file.

To deserialize the raw part content (for example, to JSON—similar to `@RequestBody`), you can declare a concrete target `Object`, instead of `Part`, as the following example shows:

```

@PostMapping("/")
public String handle(@RequestPart("meta-data") MetaData metadata) { ①
    // ...
}

```

① Using `@RequestPart` to get the metadata.

You can use `@RequestPart` in combination with `javax.validation.Valid` or Spring's `@Validated` annotation, which causes Standard Bean Validation to be applied. Validation errors lead to a `WebExchangeBindException` that results in a 400 (BAD\_REQUEST) response. The exception contains a `BindingResult` with the error details and can also be handled in the controller method by declaring the argument with an async wrapper and then using error related operators:

```
public String handle(@Valid @RequestPart("meta-data") Mono<MetaData> metadata) {  
    // use one of the onError* operators...
```

To access all multipart data as a `MultiValueMap`, you can use `@RequestBody`, as the following example shows:

```
@PostMapping("/")  
public String handle(@RequestBody Mono<MultiValueMap<String, Part>> parts) { ①  
    // ...  
}
```

① Using `@RequestBody`.

To access multipart data sequentially, in streaming fashion, you can use `@RequestBody` with `Flux<Part>` instead, as the following example shows:

```
@PostMapping("/")  
public String handle(@RequestBody Flux<Part> parts) { ①  
    // ...  
}
```

① Using `@RequestBody`.

## `@RequestBody`

Same as in Spring MVC

You can use the `@RequestBody` annotation to have the request body read and deserialized into an `Object` through an `HttpMessageReader`. The following example uses a `@RequestBody` argument:

```
@PostMapping("/accounts")  
public void handle(@RequestBody Account account) {  
    // ...  
}
```

Unlike Spring MVC, in WebFlux, the `@RequestBody` method argument supports reactive types and fully non-blocking reading and (client-to-server) streaming. The following example uses a `Mono`:

```
@PostMapping("/accounts")
public void handle(@RequestBody Mono<Account> account) {
    // ...
}
```

You can use the [HTTP message codecs](#) option of the [WebFlux Config](#) to configure or customize message readers.

You can use [@RequestBody](#) in combination with [javax.validation.Valid](#) or Spring's [@Validated](#) annotation, which causes Standard Bean Validation to be applied. Validation errors cause a [WebExchangeBindException](#), which results in a 400 (BAD\_REQUEST) response. The exception contains a [BindingResult](#) with error details and can be handled in the controller method by declaring the argument with an async wrapper and then using error related operators:

```
public void handle(@Valid @RequestBody Mono<Account> account) {
    // use one of the onError* operators...
```

## [HttpEntity](#)

[Same as in Spring MVC](#)

[HttpEntity](#) is more or less identical to using [@RequestBody](#) but is based on a container object that exposes request headers and the body. The following example uses an [HttpEntity](#):

```
@PostMapping("/accounts")
public void handle(HttpEntity<Account> entity) {
    // ...
}
```

## [@ResponseBody](#)

[Same as in Spring MVC](#)

You can use the [@ResponseBody](#) annotation on a method to have the return serialized to the response body through an [HttpMessageWriter](#). The following example shows how to do so:



```
@GetMapping("/accounts/{id}")
@ResponseBody
public Account handle() {
    // ...
}
```

`@ResponseBody` is also supported at the class level, in which case it is inherited by all controller methods. This is the effect of `@RestController`, which is nothing more than a meta-annotation marked with `@Controller` and `@ResponseBody`.

`@ResponseBody` supports reactive types, which means you can return `Reactor` or `RxJava` types and have the asynchronous values they produce rendered to the response. For additional details, see [Streaming](#) and [JSON rendering](#).

You can combine `@ResponseBody` methods with JSON serialization views. See [Jackson JSON](#) for details.

You can use the [HTTP message codecs](#) option of the [WebFlux Config](#) to configure or customize message writing.

## ResponseEntity

Same as in [Spring MVC](#)

`ResponseEntity` is like `@ResponseBody` but with status and headers. For example:

```
@GetMapping("/something")
public ResponseEntity<String> handle() {
    String body = ... ;
    String etag = ... ;
    return ResponseEntity.ok().eTag(etag).build(body);
}
```

WebFlux supports using a single value [reactive type](#) to produce the `ResponseEntity` asynchronously, and/or single and multi-value reactive types for the body.

## Jackson JSON

Spring offers support for the Jackson JSON library.

## JSON Views

Same as in [Spring MVC](#)

Spring WebFlux provides built-in support for [Jackson's Serialization Views](#), which allows rendering only a subset of all fields in an `Object`. To use it with `@ResponseBody` or `ResponseEntity` controller

methods, you can use Jackson's `@JsonView` annotation to activate a serialization view class, as the following example shows:

```
@RestController
public class UserController {

    @GetMapping("/user")
    @JsonView(User.WithoutPasswordView.class)
    public User getUser() {
        return new User("eric", "7!jd#h23");
    }
}

public class User {

    public interface WithoutPasswordView {};
    public interface WithPasswordView extends WithoutPasswordView {};

    private String username;
    private String password;

    public User() {
    }

    public User(String username, String password) {
        this.username = username;
        this.password = password;
    }

    @JsonView(WithoutPasswordView.class)
    public String getUsername() {
        return this.username;
    }

    @JsonView(WithPasswordView.class)
    public String getPassword() {
        return this.password;
    }
}
```



`@JsonView` allows an array of view classes but you can only specify only one per controller method. Use a composite interface if you need to activate multiple views.

#### 1.4.4. Model

Same as in Spring MVC

You can use the `@ModelAttribute` annotation:

- On a `method argument` in `@RequestMapping` methods to create or access an Object from the model and to bind it to the request through a `WebDataBinder`.
- As a method-level annotation in `@Controller` or `@ControllerAdvice` classes, helping to initialize the model prior to any `@RequestMapping` method invocation.
- On a `@RequestMapping` method to mark its return value as a model attribute.

This section discusses `@ModelAttribute` methods, or the second item from the preceding list. A controller can have any number of `@ModelAttribute` methods. All such methods are invoked before `@RequestMapping` methods in the same controller. A `@ModelAttribute` method can also be shared across controllers through `@ControllerAdvice`. See the section on [Controller Advice](#) for more details.

`@ModelAttribute` methods have flexible method signatures. They support many of the same arguments as `@RequestMapping` methods (except for `@ModelAttribute` itself and anything related to the request body).

The following example uses a `@ModelAttribute` method:

```
@ModelAttribute
public void populateModel(@RequestParam String number, Model model) {
    model.addAttribute(accountRepository.findAccount(number));
    // add more ...
}
```

The following example adds one attribute only:

```
@ModelAttribute
public Account addAccount(@RequestParam String number) {
    return accountRepository.findAccount(number);
}
```



When a name is not explicitly specified, a default name is chosen based on the type, as explained in the javadoc for [Conventions](#). You can always assign an explicit name by using the overloaded `addAttribute` method or through the `name` attribute on `@ModelAttribute` (for a return value).

Spring WebFlux, unlike Spring MVC, explicitly supports reactive types in the model (for example, `Mono<Account>` or `io.reactivex.Single<Account>`). Such asynchronous model attributes can be transparently resolved (and the model updated) to their actual values at the time of `@RequestMapping` invocation, provided a `@ModelAttribute` argument is declared without a wrapper, as the following example shows:

```

@ModelAttribute
public void addAccount(@RequestParam String number) {
    Mono<Account> accountMono = accountRepository.findAccount(number);
    model.addAttribute("account", accountMono);
}

@PostMapping("/accounts")
public String handle(@ModelAttribute Account account, BindingResult errors) {
    // ...
}

```

In addition, any model attributes that have a reactive type wrapper are resolved to their actual values (and the model updated) just prior to view rendering.

You can also use `@ModelAttribute` as a method-level annotation on `@RequestMapping` methods, in which case the return value of the `@RequestMapping` method is interpreted as a model attribute. This is typically not required, as it is the default behavior in HTML controllers, unless the return value is a `String` that would otherwise be interpreted as a view name. `@ModelAttribute` can also help to customize the model attribute name, as the following example shows:

```

@GetMapping("/accounts/{id}")
@ModelAttribute("myAccount")
public Account handle() {
    // ...
    return account;
}

```

### 1.4.5. DataBinder

Same as in Spring MVC

`@Controller` or `@ControllerAdvice` classes can have `@InitBinder` methods, to initialize instances of `WebDataBinder`. Those, in turn, are used to:

- Bind request parameters (that is, form data or query) to a model object.
- Convert `String`-based request values (such as request parameters, path variables, headers, cookies, and others) to the target type of controller method arguments.
- Format model object values as `String` values when rendering HTML forms.

`@InitBinder` methods can register controller-specific `java.beans.PropertyEditor` or Spring `Converter` and `Formatter` components. In addition, you can use the [WebFlux Java configuration](#) to register `Converter` and `Formatter` types in a globally shared `FormattingConversionService`.

`@InitBinder` methods support many of the same arguments that `@RequestMapping` methods do, except

for `@ModelAttribute` (command object) arguments. Typically, they are declared with a `WebDataBinder` argument, for registrations, and a `void` return value. The following example uses the `@InitBinder` annotation:

```
@Controller
public class FormController {

    @InitBinder ①
    public void initBinder(WebDataBinder binder) {
        SimpleDateFormat dateFormat = new SimpleDateFormat("yyyy-MM-dd");
        dateFormat.setLenient(false);
        binder.registerCustomEditor(Date.class, new CustomDateEditor(dateFormat,
false));
    }

    // ...
}
```

① Using the `@InitBinder` annotation.

Alternatively, when using a `Formatter`-based setup through a shared `FormattingConversionService`, you could re-use the same approach and register controller-specific `Formatter` instances, as the following example shows:

```
@Controller
public class FormController {

    @InitBinder
    protected void initBinder(WebDataBinder binder) {
        binder.addCustomFormatter(new DateFormatter("yyyy-MM-dd")); ①
    }

    // ...
}
```

① Adding a custom formatter (a `DateFormatter`, in this case).

## 1.4.6. Managing Exceptions

Same as in Spring MVC

`@Controller` and `@ControllerAdvice` classes can have `@ExceptionHandler` methods to handle exceptions from controller methods. The following example includes such a handler method:

```

@Controller
public class SimpleController {

    // ...

    @ExceptionHandler ①
    public ResponseEntity<String> handle(IOException ex) {
        // ...
    }
}

```

① Declaring an `@ExceptionHandler`:

The exception can match against a top-level exception being propagated (that is, a direct `IOException` being thrown) or against the immediate cause within a top-level wrapper exception (for example, an `IOException` wrapped inside an `IllegalStateException`).

For matching exception types, preferably declare the target exception as a method argument, as shown in the preceding example. Alternatively, the annotation declaration can narrow the exception types to match. We generally recommend being as specific as possible in the argument signature and to declare your primary root exception mappings on a `@ControllerAdvice` prioritized with a corresponding order. See [the MVC section](#) for details.



An `@ExceptionHandler` method in WebFlux supports the same method arguments and return values as a `@RequestMapping` method, with the exception of request body- and `@ModelAttribute`-related method arguments.

Support for `@ExceptionHandler` methods in Spring WebFlux is provided by the `HandlerAdapter` for `@RequestMapping` methods. See `DispatcherHandler` for more detail.

## REST API exceptions

[Same as in Spring MVC](#)

A common requirement for REST services is to include error details in the body of the response. The Spring Framework does not automatically do so, because the representation of error details in the response body is application-specific. However, a `@RestController` can use `@ExceptionHandler` methods with a `ResponseEntity` return value to set the status and the body of the response. Such methods can also be declared in `@ControllerAdvice` classes to apply them globally.



Note that Spring WebFlux does not have an equivalent for the Spring MVC `ResponseEntityExceptionHandler`, because WebFlux raises only `ResponseStatusException` (or subclasses thereof), and those do not need to be translated to an HTTP status code.

## 1.4.7. Controller Advice

Same as in Spring MVC

Typically, the `@ExceptionHandler`, `@InitBinder`, and `@ModelAttribute` methods apply within the `@Controller` class (or class hierarchy) in which they are declared. If you want such methods to apply more globally (across controllers), you can declare them in a class annotated with `@ControllerAdvice` or `@RestControllerAdvice`.

`@ControllerAdvice` is annotated with `@Component`, which means that such classes can be registered as Spring beans through [component scanning](#). `@RestControllerAdvice` is a composed annotation that is annotated with both `@ControllerAdvice` and `@ResponseBody`, which essentially means `@ExceptionHandler` methods are rendered to the response body through message conversion (versus view resolution or template rendering).

On startup, the infrastructure classes for `@RequestMapping` and `@ExceptionHandler` methods detect Spring beans annotated with `@ControllerAdvice` and then apply their methods at runtime. Global `@ExceptionHandler` methods (from a `@ControllerAdvice`) are applied *after* local ones (from the `@Controller`). By contrast, global `@ModelAttribute` and `@InitBinder` methods are applied *before* local ones.

By default, `@ControllerAdvice` methods apply to every request (that is, all controllers), but you can narrow that down to a subset of controllers by using attributes on the annotation, as the following example shows:

```
// Target all Controllers annotated with @RestController
@ControllerAdvice(annotations = RestController.class)
public class ExampleAdvice1 {}

// Target all Controllers within specific packages
@ControllerAdvice("org.example.controllers")
public class ExampleAdvice2 {}

// Target all Controllers assignable to specific classes
@ControllerAdvice(assignableTypes = {ControllerInterface.class,
AbstractController.class})
public class ExampleAdvice3 {}
```

The selectors in the preceding example are evaluated at runtime and may negatively impact performance if used extensively. See the `@ControllerAdvice` javadoc for more details.

## 1.5. Functional Endpoints

Spring WebFlux includes `WebFlux.fn`, a lightweight functional programming model in which functions are used to route and handle requests and contracts are designed for immutability. It is an alternative to the annotation-based programming model but otherwise runs on the same [Reactive Core](#) foundation.

### 1.5.1. Overview

In `WebFlux.fn`, an HTTP request is handled with a `HandlerFunction`: a function that takes `ServerRequest` and returns a delayed `ServerResponse` (i.e. `Mono<ServerResponse>`). Both the request as the response object have immutable contracts that offer JDK 8-friendly access to the HTTP request and response. `HandlerFunction` is the equivalent of the body of a `@RequestMapping` method in the annotation-based programming model.

Incoming requests are routed to a handler function with a `RouterFunction`: a function that takes `ServerRequest` and returns a delayed `HandlerFunction` (i.e. `Mono<HandlerFunction>`). When the router function matches, a handler function is returned; otherwise an empty `Mono`. `RouterFunction` is the equivalent of a `@RequestMapping` annotation, but with the major difference that router functions provide not just data, but also behavior.

`RouterFunctions.route()` provides a router builder that facilitates the creation of routers, as the following example shows:



```

import static org.springframework.http.MediaType.APPLICATION_JSON;
import static org.springframework.web.reactive.function.server.RequestPredicates.*;
import static
org.springframework.web.reactive.function.server.RouterFunctions.route;

PersonRepository repository = ...
PersonHandler handler = new PersonHandler(repository);

RouterFunction<ServerResponse> route = route()
    .GET("/person/{id}", accept(APPLICATION_JSON), handler::getPerson)
    .GET("/person", accept(APPLICATION_JSON), handler::listPeople)
    .POST("/person", handler::createPerson)
    .build();

public class PersonHandler {

    // ...

    public Mono<ServerResponse> listPeople(ServerRequest request) {
        // ...
    }

    public Mono<ServerResponse> createPerson(ServerRequest request) {
        // ...
    }

    public Mono<ServerResponse> getPerson(ServerRequest request) {
        // ...
    }
}

```

One way to run a **RouterFunction** is to turn it into an **HttpHandler** and install it through one of the built-in **server adapters**:

- **RouterFunctions.toHttpHandler(RouterFunction)**
- **RouterFunctions.toHttpHandler(RouterFunction, HandlerStrategies)**

Most applications can run through the WebFlux Java configuration, see [Running a Server](#).

### 1.5.2. HandlerFunction

**ServerRequest** and **ServerResponse** are immutable interfaces that offer JDK 8-friendly access to the HTTP request and response. Both request and response provide **Reactive Streams** back pressure against the body streams. The request body is represented with a Reactor **Flux** or **Mono**. The response body is represented with any Reactive Streams **Publisher**, including **Flux** and **Mono**. For more on that, see [Reactive Libraries](#).

## ServerRequest

`ServerRequest` provides access to the HTTP method, URI, headers, and query parameters, while access to the body is provided through the `body` methods.

The following example extracts the request body to a `Mono<String>`:

```
Mono<String> string = request.bodyToMono(String.class);
```

The following example extracts the body to a `Flux<Person>`, where `Person` objects are decoded from some serialized form, such as JSON or XML:

```
Flux<Person> people = request.bodyToFlux(Person.class);
```

The preceding examples are shortcuts that use the more general `ServerRequest.body(BodyExtractor)`, which accepts the `BodyExtractor` functional strategy interface. The utility class `BodyExtractors` provides access to a number of instances. For example, the preceding examples can also be written as follows:

```
Mono<String> string = request.body(BodyExtractors.toMono(String.class));  
Flux<Person> people = request.body(BodyExtractors.toFlux(Person.class));
```

The following example shows how to access form data:

```
Mono<MultiValueMap<String, String> map = request.body(BodyExtractors.toFormData()  
);
```

The following example shows how to access multipart data as a map:

```
Mono<MultiValueMap<String, Part> map = request.body(BodyExtractors.  
toMultipartData());
```

The following example shows how to access multipart, one at a time, in streaming fashion:

```
Flux<Part> parts = request.body(BodyExtractors.toParts());
```

## ServerResponse

**ServerResponse** provides access to the HTTP response and, since it is immutable, you can use a **build** method to create it. You can use the builder to set the response status, to add response headers, or to provide a body. The following example creates a 200 (OK) response with JSON content:

```
Mono<Person> person = ...  
ServerResponse.ok().contentType(MediaType.APPLICATION_JSON).body(person, Person  
.class);
```

The following example shows how to build a 201 (CREATED) response with a **Location** header and no body:

```
URI location = ...  
ServerResponse.created(location).build();
```

Depending on the codec used, it is possible to pass hint parameters to customize how the body is serialized or deserialized. For example, to specify a **Jackson JSON view**:

```
ServerResponse.ok().hint(Jackson2CodecSupport.JSON_VIEW_HINT, MyJacksonView.class  
) .body(...);
```

## Handler Classes

We can write a handler function as a lambda, as the following example shows:

```
HandlerFunction<ServerResponse> helloWorld =  
    request -> ServerResponse.ok().body(fromObject("Hello World"));
```

That is convenient, but in an application we need multiple functions, and multiple inline lambda's can get messy. Therefore, it is useful to group related handler functions together into a handler class, which has a similar role as **@Controller** in an annotation-based application. For example, the following class exposes a reactive **Person** repository:

```

import static org.springframework.http.MediaType.APPLICATION_JSON;
import static org.springframework.web.reactive.function.ServerResponse.ok;
import static org.springframework.web.reactive.function.BodyInserters.fromObject;

public class PersonHandler {

    private final PersonRepository repository;

    public PersonHandler(PersonRepository repository) {
        this.repository = repository;
    }

    public Mono<ServerResponse> listPeople(ServerRequest request) { ①
        Flux<Person> people = repository.allPeople();
        return ok().contentType(APPLICATION_JSON).body(people, Person.class);
    }

    public Mono<ServerResponse> createPerson(ServerRequest request) { ②
        Mono<Person> person = request.bodyToMono(Person.class);
        return ok().build(repository.savePerson(person));
    }

    public Mono<ServerResponse> getPerson(ServerRequest request) { ③
        int personId = Integer.valueOf(request.pathVariable("id"));
        return repository.getPerson(personId)
            .flatMap(person -> ok().contentType(APPLICATION_JSON).body(fromObject
(person)))
            .switchIfEmpty(ServerResponse.notFound().build());
    }
}

```

- ① `listPeople` is a handler function that returns all `Person` objects found in the repository as JSON.
- ② `createPerson` is a handler function that stores a new `Person` contained in the request body. Note that `PersonRepository.savePerson(Person)` returns `Mono<Void>`: an empty `Mono` that emits a completion signal when the person has been read from the request and stored. So we use the `build(Publisher<Void>)` method to send a response when that completion signal is received (that is, when the `Person` has been saved).
- ③ `getPerson` is a handler function that returns a single person, identified by the `id` path variable. We retrieve that `Person` from the repository and create a JSON response, if it is found. If it is not found, we use `switchIfEmpty(Mono<T>)` to return a 404 Not Found response.

## Validation

A functional endpoint can use Spring's [validation facilities](#) to apply validation to the request body. For example, given a custom Spring [Validator](#) implementation for a `Person`:

```

public class PersonHandler {

    private final Validator validator = new PersonValidator(); ①

    // ...

    public Mono<ServerResponse> createPerson(ServerRequest request) {
        Mono<Person> person = request.bodyToMono(Person.class).doOnNext(this:
:validate); ②
        return ok().build(repository.savePerson(person));
    }

    private void validate(Person person) {
        Errors errors = new BeanPropertyBindingResult(body, "person");
        validator.validate(body, errors);
        if (errors.hasErrors) {
            throw new ServerWebInputException(errors.toString()); ③
        }
    }
}

```

① Create `Validator` instance.

② Apply validation.

③ Raise exception for a 400 response.

Handlers can also use the standard bean validation API (JSR-303) by creating and injecting a global `Validator` instance based on `LocalValidatorFactoryBean`. See [Spring Validation](#).

### 1.5.3. RouterFunction

Router functions are used to route the requests to the corresponding `HandlerFunction`. Typically, you do not write router functions yourself, but rather use a method on the `RouterFunctions` utility class to create one. `RouterFunctions.route()` (no parameters) provides you with a fluent builder for creating a router function, whereas `RouterFunctions.route(RequestPredicate, HandlerFunction)` offers a direct way to create a router.

Generally, it is recommended to use the `route()` builder, as it provides convenient short-cuts for typical mapping scenarios without requiring hard-to-discover static imports. For instance, the router function builder offers the method `GET(String, HandlerFunction)` to create a mapping for GET requests; and `POST(String, HandlerFunction)` for POSTs.

Besides HTTP method-based mapping, the route builder offers a way to introduce additional predicates when mapping to requests. For each HTTP method there is an overloaded variant that takes a `RequestPredicate` as a parameter, though which additional constraints can be expressed.

#### Predicates

You can write your own `RequestPredicate`, but the `RequestPredicates` utility class offers commonly

used implementations, based on the request path, HTTP method, content-type, and so on. The following example uses a request predicate to create a constraint based on the `Accept` header:

```
RouterFunction<ServerResponse> route = RouterFunctions.route()
    .GET("/hello-world", accept(MediaType.TEXT_PLAIN),
        request -> Response.ok().body(fromObject("Hello World")));
```

You can compose multiple request predicates together by using:

- `RequestPredicate.and(RequestPredicate)` — both must match.
- `RequestPredicate.or(RequestPredicate)` — either can match.

Many of the predicates from `RequestPredicates` are composed. For example, `RequestPredicates.GET(String)` is composed from `RequestPredicates.method(HttpMethod)` and `RequestPredicates.path(String)`. The example shown above also uses two request predicates, as the builder uses `RequestPredicates.GET` internally, and composes that with the `accept` predicate.

## Routes

Router functions are evaluated in order: if the first route does not match, the second is evaluated, and so on. Therefore, it makes sense to declare more specific routes before general ones. Note that this behavior is different from the annotation-based programming model, where the "most specific" controller method is picked automatically.

When using the router function builder, all defined routes are composed into one `RouterFunction` that is returned from `build()`. There are also other ways to compose multiple router functions together:

- `add(RouterFunction)` on the `RouterFunctions.route()` builder
- `RouterFunction.and(RouterFunction)`
- `RouterFunction.andRoute(RequestPredicate, HandlerFunction)` — shortcut for `RouterFunction.and()` with nested `RouterFunctions.route()`.

The following example shows the composition of four routes:

```
import static org.springframework.http.MediaType.APPLICATION_JSON;
import static org.springframework.web.reactive.function.server.RequestPredicates.*;

PersonRepository repository = ...
PersonHandler handler = new PersonHandler(repository);

RouterFunction<ServerResponse> otherRoute = ...

RouterFunction<ServerResponse> route = route()
    .GET("/person/{id}", accept(APPLICATION_JSON), handler::getPerson) ①
    .GET("/person", accept(APPLICATION_JSON), handler::listPeople) ②
    .POST("/person", handler::createPerson) ③
    .add(otherRoute) ④
    .build();
```

- ① GET /person/{id} with an **Accept** header that matches JSON is routed to **PersonHandler.getPerson**
- ② GET /person with an **Accept** header that matches JSON is routed to **PersonHandler.listPeople**
- ③ POST /person with no additional predicates is mapped to **PersonHandler.createPerson**, and
- ④ **otherRoute** is a router function that is created elsewhere, and added to the route built.

## Nested Routes

It is common for a group of router functions to have a shared predicate, for instance a shared path. In the example above, the shared predicate would be a path predicate that matches **/person**, used by three of the routes. When using annotations, you would remove this duplication by using a type-level **@RequestMapping** annotation that maps to **/person**. In **WebFlux.fn**, path predicates can be shared through the **path** method on the router function builder. For instance, the last few lines of the example above can be improved in the following way by using nested routes:

```
RouterFunction<ServerResponse> route = route()
    .path("/person", builder -> builder
        .GET("/{id}", accept(APPLICATION_JSON), handler::getPerson)
        .GET("", accept(APPLICATION_JSON), handler::listPeople)
        .POST("/person", handler::createPerson))
    .build();
```

Note that second parameter of **path** is a consumer that takes the a router builder.

Though path-based nesting is the most common, you can nest on any kind of predicate by using the **nest** method on the builder. The above still contains some duplication in the form of the shared **Accept**-header predicate. We can further improve by using the **nest** method together with **accept**:

```
RouterFunction<ServerResponse> route = route()
    .path("/person", b1 -> b1
        .nest(accept(APPLICATION_JSON), b2 -> b2
            .GET("/{id}", handler::getPerson)
            .GET("", handler::listPeople))
        .POST("/person", handler::createPerson))
    .build();
```

### 1.5.4. Running a Server

How do you run a router function in an HTTP server? A simple option is to convert a router function to an `HandlerFunction` by using one of the following:

- `RouterFunctions.toHandlerFunction(RouterFunction)`
- `RouterFunctions.toHandlerFunction(RouterFunction, HandlerStrategies)`

You can then use the returned `HandlerFunction` with a number of server adapters by following [HandlerFunction](#) for server-specific instructions.

A more typical option, also used by Spring Boot, is to run with a `DispatcherHandler`-based setup through the [WebFlux Config](#), which uses Spring configuration to declare the components required to process requests. The WebFlux Java configuration declares the following infrastructure components to support functional endpoints:

- `RouterFunctionMapping`: Detects one or more `RouterFunction<?>` beans in the Spring configuration, combines them through `RouterFunction.andOther`, and routes requests to the resulting composed `RouterFunction`.
- `HandlerFunctionAdapter`: Simple adapter that lets `DispatcherHandler` invoke a `HandlerFunction` that was mapped to a request.
- `ServerResponseResultHandler`: Handles the result from the invocation of a `HandlerFunction` by invoking the `writeTo` method of the `ServerResponse`.

The preceding components let functional endpoints fit within the `DispatcherHandler` request processing lifecycle and also (potentially) run side by side with annotated controllers, if any are declared. It is also how functional endpoints are enabled by the Spring Boot WebFlux starter.

The following example shows a WebFlux Java configuration (see [DispatcherHandler](#) for how to run it):



```

@Configuration
@EnableWebFlux
public class WebConfig implements WebFluxConfigurer {

    @Bean
    public RouterFunction<?> routerFunctionA() {
        // ...
    }

    @Bean
    public RouterFunction<?> routerFunctionB() {
        // ...
    }

    // ...

    @Override
    public void configureHttpMessageCodecs(ServerCodecConfigurer configurator) {
        // configure message conversion...
    }

    @Override
    public void addCorsMappings(CorsRegistry registry) {
        // configure CORS...
    }

    @Override
    public void configureViewResolvers(ViewResolverRegistry registry) {
        // configure view resolution for HTML rendering...
    }
}

```

### 1.5.5. Filtering Handler Functions

You can filter handler functions by using the `before`, `after`, or `filter` methods on the routing function builder. With annotations, you can achieve similar functionality by using `@ControllerAdvice`, a `ServletFilter`, or both. The filter will apply to all routes that are built by the builder. This means that filters defined in nested routes do not apply to "top-level" routes. For instance, consider the following example:

```

RouterFunction<ServerResponse> route = route()
    .path("/person", b1 -> b1
        .nest(accept(APPLICATION_JSON), b2 -> b2
            .GET("/{id}", handler::getPerson)
            .GET("", handler::listPeople)
            .before(request -> ServerRequest.from(request) ①
                .header("X-RequestHeader", "Value")
                .build()))
            .POST("/person", handler::createPerson))
    .after((request, response) -> logResponse(response)) ②
    .build();

```

- ① The **before** filter that adds a custom request header is only applied to the two GET routes.
- ② The **after** filter that logs the response is applied to all routes, including the nested ones.

The **filter** method on the router builder takes a **HandlerFilterFunction**: a function that takes a **ServerRequest** and **HandlerFunction** and returns a **ServerResponse**. The handler function parameter represents the next element in the chain. This is typically the handler that is routed to, but it can also be another filter if multiple are applied.

Now we can add a simple security filter to our route, assuming that we have a **SecurityManager** that can determine whether a particular path is allowed. The following example shows how to do so:

```

SecurityManager securityManager = ...

RouterFunction<ServerResponse> route = route()
    .path("/person", b1 -> b1
        .nest(accept(APPLICATION_JSON), b2 -> b2
            .GET("/{id}", handler::getPerson)
            .GET("", handler::listPeople))
        .POST("/person", handler::createPerson))
    .filter((request, next) -> {
        if (securityManager.allowAccessTo(request.path())) {
            return next.handle(request);
        }
        else {
            return ServerResponse.status(UNAUTHORIZED).build();
        }
    })
    .build();

```

The preceding example demonstrates that invoking the **next.handle(ServerRequest)** is optional. We allow only the handler function to be executed when access is allowed.

Besides using the **filter** method on the router function builder, it is possible to apply a filter to an

existing router function via `RouterFunction.filter(HandlerFilterFunction)`.



CORS support for functional endpoints is provided through a dedicated `CorsWebFilter`.

## 1.6. URI Links

Same as in [Spring MVC](#)

This section describes various options available in the Spring Framework to prepare URIs.

### 1.6.1. UriComponents

Spring MVC and Spring WebFlux

`UriComponentsBuilder` helps to build URI's from URI templates with variables, as the following example shows:

```
UriComponents uriComponents = UriComponentsBuilder
    .fromUriString("https://example.com/hotels/{hotel}") ①
    .queryParams("q", "{q}") ②
    .encode() ③
    .build(); ④

URI uri = uriComponents.expand("Westin", "123").toUri(); ⑤
```

- ① Static factory method with a URI template.
- ② Add or replace URI components.
- ③ Request to have the URI template and URI variables encoded.
- ④ Build a `UriComponents`.
- ⑤ Expand variables and obtain the `URI`.

The preceding example can be consolidated into one chain and shortened with `buildAndExpand`, as the following example shows:

```
URI uri = UriComponentsBuilder
    .fromUriString("https://example.com/hotels/{hotel}")
    .queryParams("q", "{q}")
    .encode()
    .buildAndExpand("Westin", "123")
    .toUri();
```

You can shorten it further by going directly to a `URI` (which implies encoding), as the following

example shows:

```
URI uri = UriComponentsBuilder
    .fromUriString("https://example.com/hotels/{hotel}")
    .queryParams("q", "{q}")
    .build("Westin", "123");
```

You shorten it further still with a full URI template, as the following example shows:

```
URI uri = UriComponentsBuilder
    .fromUriString("https://example.com/hotels/{hotel}?q={q}")
    .build("Westin", "123");
```

## 1.6.2. UriBuilder

Spring MVC and Spring WebFlux

`UriComponentsBuilder` implements `UriBuilder`. You can create a `UriBuilder`, in turn, with a `UriBuilderFactory`. Together, `UriBuilderFactory` and `UriBuilder` provide a pluggable mechanism to build URIs from URI templates, based on shared configuration, such as a base URL, encoding preferences, and other details.

You can configure `RestTemplate` and `WebClient` with a `UriBuilderFactory` to customize the preparation of URIs. `DefaultUriBuilderFactory` is a default implementation of `UriBuilderFactory` that uses `UriComponentsBuilder` internally and exposes shared configuration options.

The following example shows how to configure a `RestTemplate`:

```
// import org.springframework.web.util.DefaultUriBuilderFactory.EncodingMode;

String baseUrl = "https://example.org";
DefaultUriBuilderFactory factory = new DefaultUriBuilderFactory(baseUrl);
factory.setEncodingMode(EncodingMode.TEMPLATE_AND_VARIABLES);

RestTemplate restTemplate = new RestTemplate();
restTemplate.setUriTemplateHandler(factory);
```

The following example configures a `WebClient`:

```
// import org.springframework.web.util.DefaultUriBuilderFactory.EncodingMode;

String baseUrl = "https://example.org";
DefaultUriBuilderFactory factory = new DefaultUriBuilderFactory(baseUrl);
factory.setEncodingMode(EncodingMode.TEMPLATE_AND_VARIABLES);

WebClient client = WebClient.builder().uriBuilderFactory(factory).build();
```

In addition, you can also use `DefaultUriBuilderFactory` directly. It is similar to using `UriComponentsBuilder` but, instead of static factory methods, it is an actual instance that holds configuration and preferences, as the following example shows:

```
String baseUrl = "https://example.com";
DefaultUriBuilderFactory uriBuilderFactory = new DefaultUriBuilderFactory(baseUrl);

URI uri = uriBuilderFactory.uriString("/hotels/{hotel}")
    .queryParam("q", "{q}")
    .build("Westin", "123");
```

### 1.6.3. URI Encoding

Spring MVC and Spring WebFlux

`UriComponentsBuilder` exposes encoding options at two levels:

- `UriComponentsBuilder#encode()`: Pre-encodes the URI template first and then strictly encodes URI variables when expanded.
- `UriComponents#encode()`: Encodes URI components *after* URI variables are expanded.

Both options replace non-ASCII and illegal characters with escaped octets. However, the first option also replaces characters with reserved meaning that appear in URI variables.



Consider ";", which is legal in a path but has reserved meaning. The first option replaces ";" with "%3B" in URI variables but not in the URI template. By contrast, the second option never replaces ";", since it is a legal character in a path.

For most cases, the first option is likely to give the expected result, because it treats URI variables as opaque data to be fully encoded, while option 2 is useful only if URI variables intentionally contain reserved characters.

The following example uses the first option:

```
URI uri = UriComponentsBuilder.fromPath("/hotel list/{city}")
    .queryParams("q", "{q}")
    .encode()
    .buildAndExpand("New York", "foo+bar")
    .toUri();

// Result is "/hotel%20list/New%20York?q=foo%2Bbar"
```

You can shorten the preceding example by going directly to the URI (which implies encoding), as the following example shows:

```
URI uri = UriComponentsBuilder.fromPath("/hotel list/{city}")
    .queryParams("q", "{q}")
    .build("New York", "foo+bar")
```

You can shorten it further still with a full URI template, as the following example shows:

```
URI uri = UriComponentsBuilder.fromPath("/hotel list/{city}?q={q}")
    .build("New York", "foo+bar")
```

The `WebClient` and the `RestTemplate` expand and encode URI templates internally through the `UriBuilderFactory` strategy. Both can be configured with a custom strategy. as the following example shows:

```
String baseUrl = "https://example.com";
DefaultUriBuilderFactory factory = new DefaultUriBuilderFactory(baseUrl)
factory.setEncodingMode(EncodingMode.TEMPLATE_AND_VALUES);

// Customize the RestTemplate..
RestTemplate restTemplate = new RestTemplate();
restTemplate.setUriTemplateHandler(factory);

// Customize the WebClient..
WebClient client = WebClient.builder().uriBuilderFactory(factory).build();
```

The `DefaultUriBuilderFactory` implementation uses `UriComponentsBuilder` internally to expand and encode URI templates. As a factory, it provides a single place to configure the approach to encoding, based on one of the below encoding modes:

- **TEMPLATE\_AND\_VALUES**: Uses `UriComponentsBuilder#encode()`, corresponding to the first option in the earlier list, to pre-encode the URI template and strictly encode URI variables when expanded.
- **VALUES\_ONLY**: Does not encode the URI template and, instead, applies strict encoding to URI variables through `UriUtils#encodeUriUriVariables` prior to expanding them into the template.
- **URI\_COMPONENTS**: Uses `UriComponents#encode()`, corresponding to the second option in the earlier list, to encode URI component value *after* URI variables are expanded.
- **NONE**: No encoding is applied.

The `RestTemplate` is set to `EncodingMode.URI_COMPONENTS` for historic reasons and for backwards compatibility. The `WebClient` relies on the default value in `DefaultUriBuilderFactory`, which was changed from `EncodingMode.URI_COMPONENTS` in 5.0.x to `EncodingMode.TEMPLATE_AND_VALUES` in 5.1.

## 1.7. CORS

Same as in Spring MVC

Spring WebFlux lets you handle CORS (Cross-Origin Resource Sharing). This section describes how to do so.

### 1.7.1. Introduction

Same as in Spring MVC

For security reasons, browsers prohibit AJAX calls to resources outside the current origin. For example, you could have your bank account in one tab and `evil.com` in another. Scripts from `evil.com` should not be able to make AJAX requests to your bank API with your credentials—for example, withdrawing money from your account!

Cross-Origin Resource Sharing (CORS) is a [W3C specification](#) implemented by [most browsers](#) that lets you specify what kind of cross-domain requests are authorized, rather than using less secure and less powerful workarounds based on `IFRAME` or `JSONP`.

### 1.7.2. Processing

Same as in Spring MVC

The CORS specification distinguishes between preflight, simple, and actual requests. To learn how CORS works, you can read [this article](#), among many others, or see the specification for more details.

Spring WebFlux `HandlerMapping` implementations provide built-in support for CORS. After successfully mapping a request to a handler, a `HandlerMapping` checks the CORS configuration for the given request and handler and takes further actions. Preflight requests are handled directly, while simple and actual CORS requests are intercepted, validated, and have the required CORS response headers set.

In order to enable cross-origin requests (that is, the `Origin` header is present and differs from the host of the request), you need to have some explicitly declared CORS configuration. If no matching

CORS configuration is found, preflight requests are rejected. No CORS headers are added to the responses of simple and actual CORS requests and, consequently, browsers reject them.

Each `HandlerMapping` can be `configured` individually with URL pattern-based `CorsConfiguration` mappings. In most cases, applications use the WebFlux Java configuration to declare such mappings, which results in a single, global map passed to all `HandlerMapping` implementations.

You can combine global CORS configuration at the `HandlerMapping` level with more fine-grained, handler-level CORS configuration. For example, annotated controllers can use class- or method-level `@CrossOrigin` annotations (other handlers can implement `CorsConfigurationSource`).

The rules for combining global and local configuration are generally additive—for example, all global and all local origins. For those attributes where only a single value can be accepted, such as `allowCredentials` and `maxAge`, the local overrides the global value. See `CorsConfiguration#combine(CorsConfiguration)` for more details.



To learn more from the source or to make advanced customizations, see:

- `CorsConfiguration`
- `CorsProcessor` and `DefaultCorsProcessor`
- `AbstractHandlerMapping`

### 1.7.3. `@CrossOrigin`

Same as in Spring MVC

The `@CrossOrigin` annotation enables cross-origin requests on annotated controller methods, as the following example shows:

```
@RestController
@RequestMapping("/account")
public class AccountController {

    @CrossOrigin
    @GetMapping("/{id}")
    public Mono<Account> retrieve(@PathVariable Long id) {
        // ...
    }

    @DeleteMapping("/{id}")
    public Mono<Void> remove(@PathVariable Long id) {
        // ...
    }
}
```

By default, `@CrossOrigin` allows:



- All origins.
- All headers.
- All HTTP methods to which the controller method is mapped.

`allowedCredentials` is not enabled by default, since that establishes a trust level that exposes sensitive user-specific information (such as cookies and CSRF tokens) and should be used only where appropriate.

`maxAge` is set to 30 minutes.

`@CrossOrigin` is supported at the class level, too, and inherited by all methods. The following example specifies a certain domain and sets `maxAge` to an hour:

```
@CrossOrigin(origins = "https://domain2.com", maxAge = 3600)
@RestController
@RequestMapping("/account")
public class AccountController {

    @GetMapping("/{id}")
    public Mono<Account> retrieve(@PathVariable Long id) {
        // ...
    }

    @DeleteMapping("/{id}")
    public Mono<Void> remove(@PathVariable Long id) {
        // ...
    }
}
```

You can use `@CrossOrigin` at both the class and the method level, as the following example shows:

```

@CrossOrigin(maxAge = 3600) ①
@RestController
@RequestMapping("/account")
public class AccountController {

    @CrossOrigin("https://domain2.com") ②
    @GetMapping("/{id}")
    public Mono<Account> retrieve(@PathVariable Long id) {
        // ...
    }

    @DeleteMapping("/{id}")
    public Mono<Void> remove(@PathVariable Long id) {
        // ...
    }
}

```

① Using `@CrossOrigin` at the class level.

② Using `@CrossOrigin` at the method level.

### 1.7.4. Global Configuration

Same as in Spring MVC

In addition to fine-grained, controller method-level configuration, you probably want to define some global CORS configuration, too. You can set URL-based `CorsConfiguration` mappings individually on any `HandlerMapping`. Most applications, however, use the WebFlux Java configuration to do that.

By default global configuration enables the following:

- All origins.
- All headers.
- `GET`, `HEAD`, and `POST` methods.

`allowedCredentials` is not enabled by default, since that establishes a trust level that exposes sensitive user-specific information( such as cookies and CSRF tokens) and should be used only where appropriate.

`maxAge` is set to 30 minutes.

To enable CORS in the WebFlux Java configuration, you can use the `CorsRegistry` callback, as the following example shows:

```

@Configuration
@EnableWebFlux
public class WebConfig implements WebFluxConfigurer {

    @Override
    public void addCorsMappings(CorsRegistry registry) {

        registry.addMapping("/api/**")
            .allowedOrigins("https://domain2.com")
            .allowedMethods("PUT", "DELETE")
            .allowedHeaders("header1", "header2", "header3")
            .exposedHeaders("header1", "header2")
            .allowCredentials(true).maxAge(3600);

        // Add more mappings...
    }
}

```

### 1.7.5. CORS WebFilter

Same as in Spring MVC

You can apply CORS support through the built-in `CorsWebFilter`, which is a good fit with [functional endpoints](#).



If you try to use the `CorsFilter` with Spring Security, keep in mind that Spring Security has [built-in support](#) for CORS.

To configure the filter, you can declare a `CorsWebFilter` bean and pass a `CorsConfigurationSource` to its constructor, as the following example shows:

```

@Bean
CorsWebFilter corsFilter() {

    CorsConfiguration config = new CorsConfiguration();

    // Possibly...
    // config.applyPermitDefaultValues()

    config.setAllowCredentials(true);
    config.addAllowedOrigin("https://domain1.com");
    config.addAllowedHeader("*");
    config.addAllowedMethod("*");

    UrlBasedCorsConfigurationSource source = new UrlBasedCorsConfigurationSource(
);
    source.registerCorsConfiguration("/**", config);

    return new CorsWebFilter(source);
}

```

## 1.8. Web Security

Same as in Spring MVC

The [Spring Security](#) project provides support for protecting web applications from malicious exploits. See the Spring Security reference documentation, including:

- [WebFlux Security](#)
- [WebFlux Testing Support](#)
- [CSRF Protection](#)
- [Security Response Headers](#)

## 1.9. View Technologies

Same as in Spring MVC

The use of view technologies in Spring WebFlux is pluggable. Whether you decide to use Thymeleaf, FreeMarker, or some other view technology is primarily a matter of a configuration change. This chapter covers the view technologies integrated with Spring WebFlux. We assume you are already familiar with [View Resolution](#).

### 1.9.1. Thymeleaf

Same as in Spring MVC

Thymeleaf is a modern server-side Java template engine that emphasizes natural HTML templates that can be previewed in a browser by double-clicking, which is very helpful for independent work on UI templates (for example, by a designer) without the need for a running server. Thymeleaf offers an extensive set of features, and it is actively developed and maintained. For a more complete introduction, see the [Thymeleaf](#) project home page.

The Thymeleaf integration with Spring WebFlux is managed by the Thymeleaf project. The configuration involves a few bean declarations, such as `SpringResourceTemplateResolver`, `SpringWebFluxTemplateEngine`, and `ThymeleafReactiveViewResolver`. For more details, see [Thymeleaf+Spring](#) and the WebFlux integration [announcement](#).

### 1.9.2. FreeMarker

[Same as in Spring MVC](#)

[Apache FreeMarker](#) is a template engine for generating any kind of text output from HTML to email and others. The Spring Framework has a built-in integration for using Spring WebFlux with FreeMarker templates.

#### View Configuration

[Same as in Spring MVC](#)

The following example shows how to configure FreeMarker as a view technology:

```
@Configuration
@EnableWebFlux
public class WebConfig implements WebFluxConfigurer {

    @Override
    public void configureViewResolvers(ViewResolverRegistry registry) {
        registry.freemarker();
    }

    // Configure FreeMarker...

    @Bean
    public FreeMarkerConfigurer freeMarkerConfigurer() {
        FreeMarkerConfigurer configurator = new FreeMarkerConfigurer();
        configurator.setTemplateLoaderPath("classpath:/templates");
        return configurator;
    }
}
```

Your templates need to be stored in the directory specified by the `FreeMarkerConfigurer`, shown in the preceding example. Given the preceding configuration, if your controller returns the view name, `welcome`, the resolver looks for the `classpath:/templates/freemarker/welcome.ftl` template.

## FreeMarker Configuration

Same as in Spring MVC

You can pass FreeMarker 'Settings' and 'SharedVariables' directly to the FreeMarker **Configuration** object (managed by Spring) by setting the appropriate bean properties on the **FreeMarkerConfigurer** bean. The **freemarkerSettings** property requires a **java.util.Properties** object, and the **freemarkerVariables** property requires a **java.util.Map**. The following example shows how to use a **FreeMarkerConfigurer**:

```
@Configuration
@EnableWebFlux
public class WebConfig implements WebFluxConfigurer {

    // ...

    @Bean
    public FreeMarkerConfigurer freeMarkerConfigurer() {
        Map<String, Object> variables = new HashMap<>();
        variables.put("xml_escape", new XmlEscape());

        FreeMarkerConfigurer configurator = new FreeMarkerConfigurer();
        configurator.setTemplateLoaderPath("classpath:/templates");
        configurator.setFreemarkerVariables(variables);
        return configurator;
    }
}
```

See the FreeMarker documentation for details of settings and variables as they apply to the **Configuration** object.

### 1.9.3. Script Views

Same as in Spring MVC

The Spring Framework has a built-in integration for using Spring WebFlux with any templating library that can run on top of the **JSR-223** Java scripting engine. The following table shows the templating libraries that we have tested on different script engines:

Scripting Library	Scripting Engine
Handlebars	Nashorn
Mustache	Nashorn
React	Nashorn
EJS	Nashorn
ERB	JRuby

Scripting Library	Scripting Engine
<a href="#">String templates</a>	<a href="#">Jython</a>
<a href="#">Kotlin Script templating</a>	<a href="#">Kotlin</a>



The basic rule for integrating any other script engine is that it must implement the `ScriptEngine` and `Invocable` interfaces.

## Requirements

[Same as in Spring MVC](#)

You need to have the script engine on your classpath, the details of which vary by script engine:

- The [Nashorn](#) JavaScript engine is provided with Java 8+. Using the latest update release available is highly recommended.
- [JRuby](#) should be added as a dependency for Ruby support.
- [Jython](#) should be added as a dependency for Python support.
- `org.jetbrains.kotlin:kotlin-script-util` dependency and a `META-INF/services/javax.script.ScriptEngineFactory` file containing a `org.jetbrains.kotlin.script.jsr223.KotlinJs223JvmLocalScriptEngineFactory` line should be added for Kotlin script support. See [this example](#) for more detail.

You need to have the script templating library. One way to do that for Javascript is through [WebJars](#).

## Script Templates

[Same as in Spring MVC](#)

You can declare a `ScriptTemplateConfigurer` bean to specify the script engine to use, the script files to load, what function to call to render templates, and so on. The following example uses Mustache templates and the Nashorn JavaScript engine:

```

@Configuration
@EnableWebFlux
public class WebConfig implements WebFluxConfigurer {

    @Override
    public void configureViewResolvers(ViewResolverRegistry registry) {
        registry.scriptTemplate();
    }

    @Bean
    public ScriptTemplateConfigurer configurer() {
        ScriptTemplateConfigurer configurer = new ScriptTemplateConfigurer();
        configurer.setEngineName("nashorn");
        configurer.setScripts("mustache.js");
        configurer.setRenderObject("Mustache");
        configurer.setRenderFunction("render");
        return configurer;
    }
}

```

The `render` function is called with the following parameters:

- `String template`: The template content
- `Map model`: The view model
- `RenderingContext renderingContext`: The `RenderingContext` that gives access to the application context, the locale, the template loader, and the URL (since 5.0)

`Mustache.render()` is natively compatible with this signature, so you can call it directly.

If your templating technology requires some customization, you can provide a script that implements a custom render function. For example, [Handlerbars](#) needs to compile templates before using them and requires a [polyfill](#) in order to emulate some browser facilities not available in the server-side script engine. The following example shows how to set a custom render function:



```

@Configuration
@EnableWebMvc
public class WebConfig implements WebFluxConfigurer {

    @Override
    public void configureViewResolvers(ViewResolverRegistry registry) {
        registry.scriptTemplate();
    }

    @Bean
    public ScriptTemplateConfigurer configurer() {
        ScriptTemplateConfigurer configurer = new ScriptTemplateConfigurer();
        configurer.setEngineName("nashorn");
        configurer.setScripts("polyfill.js", "handlebars.js", "render.js");
        configurer.setRenderFunction("render");
        configurer.setSharedEngine(false);
        return configurer;
    }
}

```



Setting the `sharedEngine` property to `false` is required when using non-thread-safe script engines with templating libraries not designed for concurrency, such as Handlebars or React running on Nashorn. In that case, Java 8u60 or greater is required, due to [this bug](#).

`polyfill.js` defines only the `window` object needed by Handlebars to run properly, as the following snippet shows:

```
var window = {};
```

This basic `render.js` implementation compiles the template before using it. A production ready implementation should also store and reused cached templates or pre-compiled templates. This can be done on the script side, as well as any customization you need (managing template engine configuration for example). The following example shows how compile a template:

```

function render(template, model) {
    var compiledTemplate = Handlebars.compile(template);
    return compiledTemplate(model);
}

```

Check out the Spring Framework unit tests, [Java](#), and [resources](#), for more configuration examples.

## 1.9.4. JSON and XML

Same as in Spring MVC

For [Content Negotiation](#) purposes, it is useful to be able to alternate between rendering a model with an HTML template or as other formats (such as JSON or XML), depending on the content type requested by the client. To support doing so, Spring WebFlux provides the `HttpMessageWriterView`, which you can use to plug in any of the available [Codecs](#) from `spring-web`, such as `Jackson2JsonEncoder`, `Jackson2SmileEncoder`, or `Jaxb2XmlEncoder`.

Unlike other view technologies, `HttpMessageWriterView` does not require a `ViewResolver` but is instead [configured](#) as a default view. You can configure one or more such default views, wrapping different `HttpMessageWriter` instances or `Encoder` instances. The one that matches the requested content type is used at runtime.

In most cases, a model contains multiple attributes. To determine which one to serialize, you can configure `HttpMessageWriterView` with the name of the model attribute to use for rendering. If the model contains only one attribute, that one is used.

## 1.10. HTTP Caching

Same as in Spring MVC

HTTP caching can significantly improve the performance of a web application. HTTP caching revolves around the `Cache-Control` response header and subsequent conditional request headers, such as `Last-Modified` and `ETag`. `Cache-Control` advises private (for example, browser) and public (for example, proxy) caches how to cache and re-use responses. An `ETag` header is used to make a conditional request that may result in a 304 (NOT\_MODIFIED) without a body, if the content has not changed. `ETag` can be seen as a more sophisticated successor to the `Last-Modified` header.

This section describes the HTTP caching related options available in Spring WebFlux.

### 1.10.1. CacheControl

Same as in Spring MVC

`CacheControl` provides support for configuring settings related to the `Cache-Control` header and is accepted as an argument in a number of places:

- [Controllers](#)
- [Static Resources](#)

While [RFC 7234](#) describes all possible directives for the `Cache-Control` response header, the `CacheControl` type takes a use case-oriented approach that focuses on the common scenarios, as the following example shows:

```
// Cache for an hour - "Cache-Control: max-age=3600"
CacheControl ccCacheOneHour = CacheControl.maxAge(1, TimeUnit.HOURS);

// Prevent caching - "Cache-Control: no-store"
CacheControl ccNoStore = CacheControl.noStore();

// Cache for ten days in public and private caches,
// public caches should not transform the response
// "Cache-Control: max-age=864000, public, no-transform"
CacheControl ccCustom = CacheControl.maxAge(10, TimeUnit.DAYS).noTransform()
    .cachePublic();
```

## 1.10.2. Controllers

Same as in Spring MVC

Controllers can add explicit support for HTTP caching. We recommend doing so, since the `lastModified` or `ETag` value for a resource needs to be calculated before it can be compared against conditional request headers. A controller can add an `ETag` and `Cache-Control` settings to a `ResponseEntity`, as the following example shows:

```
@GetMapping("/book/{id}")
public ResponseEntity<Book> showBook(@PathVariable Long id) {

    Book book = findBook(id);
    String version = book.getVersion();

    return ResponseEntity
        .ok()
        .cacheControl(CacheControl.maxAge(30, TimeUnit.DAYS))
        .eTag(version) // lastModified is also available
        .body(book);
}
```

The preceding example sends a 304 (NOT\_MODIFIED) response with an empty body if the comparison to the conditional request headers indicates the content has not changed. Otherwise, the `ETag` and `Cache-Control` headers are added to the response.

You can also make the check against conditional request headers in the controller, as the following example shows:

```

@RequestMapping
public String myHandleMethod(ServerWebExchange exchange, Model model) {

    long eTag = ... ❶

    if (exchange.checkNotModified(eTag)) {
        return null; ❷
    }

    model.addAttribute(...); ❸
    return "myViewName";
}

```

❶ Application-specific calculation.

❷ Response has been set to 304 (NOT\_MODIFIED). No further processing.

❸ Continue with request processing.

There are three variants for checking conditional requests against `eTag` values, `lastModified` values, or both. For conditional `GET` and `HEAD` requests, you can set the response to 304 (NOT\_MODIFIED). For conditional `POST`, `PUT`, and `DELETE`, you can instead set the response to 409 (PRECONDITION\_FAILED) to prevent concurrent modification.

### 1.10.3. Static Resources

Same as in Spring MVC

You should serve static resources with a `Cache-Control` and conditional response headers for optimal performance. See the section on configuring [Static Resources](#).

## 1.11. WebFlux Config

Same as in Spring MVC

The WebFlux Java configuration declares the components that are required to process requests with annotated controllers or functional endpoints, and it offers an API to customize the configuration. That means you do not need to understand the underlying beans created by the Java configuration. However, if you want to understand them, you can see them in `WebFluxConfigurationSupport` or read more about what they are in [Special Bean Types](#).

For more advanced customizations, not available in the configuration API, you can gain full control over the configuration through the [Advanced Configuration Mode](#).

### 1.11.1. Enabling WebFlux Config

Same as in Spring MVC

You can use the `@EnableWebFlux` annotation in your Java config, as the following example shows:

```
@Configuration
@EnableWebFlux
public class WebConfig {
}
```

The preceding example registers a number of Spring WebFlux [infrastructure beans](#) and adapts to dependencies available on the classpath — for JSON, XML, and others.

### 1.11.2. WebFlux config API

[Same as in Spring MVC](#)

In your Java configuration, you can implement the `WebFluxConfigurer` interface, as the following example shows:

```
@Configuration
@EnableWebFlux
public class WebConfig implements WebFluxConfigurer {

    // Implement configuration methods...

}
```

### 1.11.3. Conversion, formatting

[Same as in Spring MVC](#)

By default, formatters for `Number` and `Date` types are installed, including support for the `@NumberFormat` and `@DateTimeFormat` annotations. Full support for the Joda-Time formatting library is also installed if Joda-Time is present on the classpath.

The following example shows how to register custom formatters and converters:

```

@Configuration
@EnableWebFlux
public class WebConfig implements WebFluxConfigurer {

    @Override
    public void addFormatters(FormatterRegistry registry) {
        // ...
    }

}

```



See [FormatterRegistrar SPI](#) and the [FormattingConversionServiceFactoryBean](#) for more information on when to use [FormatterRegistrar](#) implementations.

#### 1.11.4. Validation

Same as in Spring MVC

By default, if [Bean Validation](#) is present on the classpath (for example, the Hibernate Validator), the [LocalValidatorFactoryBean](#) is registered as a global [validator](#) for use with [@Valid](#) and [@Validated](#) on [@Controller](#) method arguments.

In your Java configuration, you can customize the global [Validator](#) instance, as the following example shows:

```

@Configuration
@EnableWebFlux
public class WebConfig implements WebFluxConfigurer {

    @Override
    public Validator getValidator(); {
        // ...
    }

}

```

Note that you can also register [Validator](#) implementations locally, as the following example shows:

```
@Controller
public class MyController {

    @InitBinder
    protected void initBinder(WebDataBinder binder) {
        binder.addValidators(new FooValidator());
    }

}
```



If you need to have a `LocalValidatorFactoryBean` injected somewhere, create a bean and mark it with `@Primary` in order to avoid conflict with the one declared in the MVC config.

### 1.11.5. Content Type Resolvers

Same as in [Spring MVC](#)

You can configure how Spring WebFlux determines the requested media types for `@Controller` instances from the request. By default, only the `Accept` header is checked, but you can also enable a query parameter-based strategy.

The following example shows how to customize the requested content type resolution:

```
@Configuration
@EnableWebFlux
public class WebConfig implements WebFluxConfigurer {

    @Override
    public void configureContentTypeResolver(RequestedContentTypeResolverBuilder
builder) {
        // ...
    }

}
```

### 1.11.6. HTTP message codecs

Same as in [Spring MVC](#)

The following example shows how to customize how the request and response body are read and written:

```

@Configuration
@EnableWebFlux
public class WebConfig implements WebFluxConfigurer {

    @Override
    public void configureHttpMessageCodecs(ServerCodecConfigurer configurator) {
        // ...
    }
}

```

`ServerCodecConfigurer` provides a set of default readers and writers. You can use it to add more readers and writers, customize the default ones, or replace the default ones completely.

For Jackson JSON and XML, consider using `Jackson2ObjectMapperBuilder`, which customizes Jackson's default properties with the following ones:

- `DeserializationFeature.FAIL_ON_UNKNOWN_PROPERTIES` is disabled.
- `MapperFeature.DEFAULT_VIEW_INCLUSION` is disabled.

It also automatically registers the following well-known modules if they are detected on the classpath:

- `jackson-datatype-jdk7`: Support for Java 7 types like `java.nio.file.Path`.
- `jackson-datatype-joda`: Support for Joda-Time types.
- `jackson-datatype-jsr310`: Support for Java 8 Date and Time API types.
- `jackson-datatype-jdk8`: Support for other Java 8 types, such as `Optional`.

### 1.11.7. View Resolvers

Same as in Spring MVC

The following example shows how to configure view resolution:

```

@Configuration
@EnableWebFlux
public class WebConfig implements WebFluxConfigurer {

    @Override
    public void configureViewResolvers(ViewResolverRegistry registry) {
        // ...
    }
}

```



The `ViewResolverRegistry` has shortcuts for view technologies with which the Spring Framework integrates. The following example uses FreeMarker (which also requires configuring the underlying FreeMarker view technology):

```
@Configuration
@EnableWebFlux
public class WebConfig implements WebFluxConfigurer {

    @Override
    public void configureViewResolvers(ViewResolverRegistry registry) {
        registry.freeMarker();
    }

    // Configure Freemarker...

    @Bean
    public FreeMarkerConfigurer freeMarkerConfigurer() {
        FreeMarkerConfigurer configurator = new FreeMarkerConfigurer();
        configurator.setTemplateLoaderPath("classpath:/templates");
        return configurator;
    }
}
```

You can also plug in any `ViewResolver` implementation, as the following example shows:

```
@Configuration
@EnableWebFlux
public class WebConfig implements WebFluxConfigurer {

    @Override
    public void configureViewResolvers(ViewResolverRegistry registry) {
        ViewResolver resolver = ... ;
        registry.viewResolver(resolver);
    }
}
```

To support `Content Negotiation` and rendering other formats through view resolution (besides HTML), you can configure one or more default views based on the `HttpMessageWriterView` implementation, which accepts any of the available `Codecs` from `spring-web`. The following example shows how to do so:

```

@Configuration
@EnableWebFlux
public class WebConfig implements WebFluxConfigurer {

    @Override
    public void configureViewResolvers(ViewResolverRegistry registry) {
        registry.freeMarker();

        Jackson2JsonEncoder encoder = new Jackson2JsonEncoder();
        registry.defaultViews(new HttpMessageWriterView(encoder));
    }

    // ...
}

```

See [View Technologies](#) for more on the view technologies that are integrated with Spring WebFlux.

### 1.11.8. Static Resources

Same as in Spring MVC

This option provides a convenient way to serve static resources from a list of **Resource**-based locations.

In the next example, given a request that starts with **/resources**, the relative path is used to find and serve static resources relative to **/static** on the classpath. Resources are served with a one-year future expiration to ensure maximum use of the browser cache and a reduction in HTTP requests made by the browser. The **Last-Modified** header is also evaluated and, if present, a **304** status code is returned. The following list shows the example:

```

@Configuration
@EnableWebFlux
public class WebConfig implements WebFluxConfigurer {

    @Override
    public void addResourceHandlers(ResourceHandlerRegistry registry) {
        registry.addResourceHandler("/resources/**")
            .addResourceLocations("/public", "classpath:/static/")
            .setCacheControl(CacheControl.maxAge(365, TimeUnit.DAYS));
    }

}

```

The resource handler also supports a chain of **ResourceResolver** implementations and

`ResourceTransformer` implementations, which can be used to create a toolchain for working with optimized resources.

You can use the `VersionResourceResolver` for versioned resource URLs based on an MD5 hash computed from the content, a fixed application version, or other information. A `ContentVersionStrategy` (MD5 hash) is a good choice with some notable exceptions (such as JavaScript resources used with a module loader).

The following example shows how to use `VersionResourceResolver` in your Java configuration:

```
@Configuration
@EnableWebFlux
public class WebConfig implements WebFluxConfigurer {

    @Override
    public void addResourceHandlers(ResourceHandlerRegistry registry) {
        registry.addResourceHandler("/resources/**")
            .addResourceLocations("/public/")
            .resourceChain(true)
            .addResolver(new VersionResourceResolver())
    }
    .addContentVersionStrategy("/**");
}
```

You can use `ResourceUrlProvider` to rewrite URLs and apply the full chain of resolvers and transformers (for example, to insert versions). The WebFlux configuration provides a `ResourceUrlProvider` so that it can be injected into others.

Unlike Spring MVC, at present, in WebFlux, there is no way to transparently rewrite static resource URLs, since there are no view technologies that can make use of a non-blocking chain of resolvers and transformers. When serving only local resources, the workaround is to use `ResourceUrlProvider` directly (for example, through a custom element) and block.

Note that, when using both `EncodedResourceResolver` (for example, Gzip, Brotli encoded) and `VersionedResourceResolver`, they must be registered in that order, to ensure content-based versions are always computed reliably based on the unencoded file.

[WebJars](#) are also supported through the `WebJarsResourceResolver` which is automatically registered when the `org.webjars:webjars-locator-core` library is present on the classpath. The resolver can rewrite URLs to include the version of the jar and can also match against incoming URLs without versions — for example, from `/jquery/jquery.min.js` to `/jquery/1.2.0/jquery.min.js`.

### 1.11.9. Path Matching

Same as in Spring MVC

You can customize options related to path matching. For details on the individual options, see the

`PathMatchConfigurer` javadoc. The following example shows how to use `PathMatchConfigurer`:

```
@Configuration
@EnableWebFlux
public class WebConfig implements WebFluxConfigurer {

    @Override
    public void configurePathMatch(PathMatchConfigurer configurer) {
        configurer
            .setUseCaseSensitiveMatch(true)
            .setUseTrailingSlashMatch(false)
            .addPathPrefix("/api",
                HandlerTypePredicate.forAnnotation(RestController.class));
    }
}
```



Spring WebFlux relies on a parsed representation of the request path called `RequestPath` for access to decoded path segment values, with semicolon content removed (that is, path or matrix variables). That means, unlike in Spring MVC, you need not indicate whether to decode the request path nor whether to remove semicolon content for path matching purposes.

Spring WebFlux also does not support suffix pattern matching, unlike in Spring MVC, where we are also [recommend](#) moving away from reliance on it.

### 1.11.10. Advanced Configuration Mode

Same as in Spring MVC

`@EnableWebFlux` imports `DelegatingWebFluxConfiguration` that:

- Provides default Spring configuration for WebFlux applications
- detects and delegates to `WebFluxConfigurer` implementations to customize that configuration.

For advanced mode, you can remove `@EnableWebFlux` and extend directly from `DelegatingWebFluxConfiguration` instead of implementing `WebFluxConfigurer`, as the following example shows:

```
@Configuration
public class WebConfig extends DelegatingWebFluxConfiguration {

    // ...

}
```

You can keep existing methods in `WebConfig`, but you can now also override bean declarations from the base class and still have any number of other `WebMvcConfigurer` implementations on the classpath.

## 1.12. HTTP/2

Same as in [Spring MVC](#)

Servlet 4 containers are required to support HTTP/2, and Spring Framework 5 is compatible with Servlet API 4. From a programming model perspective, there is nothing specific that applications need to do. However, there are considerations related to server configuration. For more details, see the [HTTP/2 wiki page](#).

Currently, Spring WebFlux does not support HTTP/2 with Netty. There is also no support for pushing resources programmatically to the client.

# Chapter 2. WebClient

Spring WebFlux includes a reactive, non-blocking `WebClient` for HTTP requests. The client has a functional, fluent API with reactive types for declarative composition, see [\[webflux-reactive-libraries\]](#). WebFlux client and server rely on the same non-blocking `codecs` to encode and decode request and response content.

Internally `WebClient` delegates to an HTTP client library. By default, it uses `Reactor Netty`, there is built-in support for the Jetty `reactive HttpClient`, and others can be plugged in through a `ClientHttpConnector`.

## 2.1. Configuration

The simplest way to create a `WebClient` is through one of the static factory methods:

- `WebClient.create()`
- `WebClient.create(String baseUrl)`

The above methods use the Reactor Netty `HttpClient` with default settings and expect `io.projectreactor.netty:reactor-netty` to be on the classpath.

You can also use `WebClient.builder()` with further options:

- `uriBuilderFactory`: Customized `UriBuilderFactory` to use as a base URL.
- `defaultHeader`: Headers for every request.
- `defaultCookie`: Cookies for every request.
- `defaultRequest`: `Consumer` to customize every request.
- `filter`: Client filter for every request.
- `exchangeStrategies`: HTTP message reader/writer customizations.
- `clientConnector`: HTTP client library settings.

The following example configures `HTTP codecs`:

```
WebClient client = WebClient.builder()
    .exchangeStrategies(builder -> {
        return builder.codecs(codecConfigurer -> {
            //...
        });
    })
    .build();
```

Once built, a `WebClient` instance is immutable. However, you can clone it and build a modified copy without affecting the original instance, as the following example shows:

```
WebClient client1 = WebClient.builder()
    .filter(filterA).filter(filterB).build();

WebClient client2 = client1.mutate()
    .filter(filterC).filter(filterD).build();

// client1 has filterA, filterB

// client2 has filterA, filterB, filterC, filterD
```

### === MaxInMemorySize

Spring WebFlux configures [limits](#) for buffering data in-memory in codec to avoid application memory issues. By the default this is configured to 256KB and if that's not enough for your use case, you'll see the following:

```
org.springframework.core.io.buffer.DataBufferLimitException: Exceeded limit on max
bytes to buffer
```

You can configure this limit on all default codecs with the following code sample:

*Java*

```
WebClient webClient = WebClient.builder()
    .exchangeStrategies(builder ->
        builder.codecs(codecs ->
            codecs.defaultCodecs().maxInMemorySize(2 * 1024 * 1024)
        )
    )
    .build();
```

### === Reactor Netty

To customize Reactor Netty settings, simply provide a pre-configured `HttpClient`:

```
HttpClient httpClient = HttpClient.create().secure(sslSpec -> ...);

WebClient webClient = WebClient.builder()
    .clientConnector(new ReactorClientHttpConnector(httpClient))
    .build();
```

#### ==== Resources

By default, `HttpClient` participates in the global Reactor Netty resources held in `reactor.netty.http.HttpResources`, including event loop threads and a connection pool. This is the recommended mode, since fixed, shared resources are preferred for event loop concurrency. In this mode global resources remain active until the process exits.

If the server is timed with the process, there is typically no need for an explicit shutdown. However, if the server can start or stop in-process (for example, a Spring MVC application deployed as a WAR), you can declare a Spring-managed bean of type `ReactorResourceFactory` with `globalResources=true` (the default) to ensure that the Reactor Netty global resources are shut down when the Spring `ApplicationContext` is closed, as the following example shows:

```
@Bean
public ReactorResourceFactory reactorResourceFactory() {
    return new ReactorResourceFactory();
}
```

You can also choose not to participate in the global Reactor Netty resources. However, in this mode, the burden is on you to ensure that all Reactor Netty client and server instances use shared resources, as the following example shows:

```
@Bean
public ReactorResourceFactory resourceFactory() {
    ReactorResourceFactory factory = new ReactorResourceFactory();
    factory.setGlobalResources(false); ①
    return factory;
}

@Bean
public WebClient webClient() {

    Function<HttpClient, HttpClient> mapper = client -> {
        // Further customizations...
    };

    ClientHttpConnector connector =
        new ReactorClientHttpConnector(resourceFactory(), mapper); ②

    return WebClient.builder().clientConnector(connector).build(); ③
}
```

① Create resources independent of global ones.

② Use the `ReactorClientHttpConnector` constructor with resource factory.



③ Plug the connector into the `WebClient.Builder`.

==== Timeouts

To configure a connection timeout:

```
import io.netty.channel.ChannelOption;

HttpClient httpClient = HttpClient.create()
    .tcpConfiguration(client ->
        client.option(ChannelOption.CONNECT_TIMEOUT_MILLIS, 10000));
```

To configure a read and/or write timeout values:

```
import io.netty.handler.timeout.ReadTimeoutHandler;
import io.netty.handler.timeout.WriteTimeoutHandler;

HttpClient httpClient = HttpClient.create()
    .tcpConfiguration(client ->
        client.doOnConnected(conn -> conn
            .addHandlerLast(new ReadTimeoutHandler(10))
            .addHandlerLast(new WriteTimeoutHandler(10))));
```

=== Jetty

The following example shows how to customize Jetty `HttpClient` settings:

```
HttpClient httpClient = new HttpClient();
httpClient.setCookieStore(...);
ClientHttpConnector connector = new JettyClientHttpConnector(httpClient);

WebClient webClient = WebClient.builder().clientConnector(connector).build();
```

By default, `HttpClient` creates its own resources (`Executor`, `ByteBufferPool`, `Scheduler`), which remain active until the process exits or `stop()` is called.

You can share resources between multiple instances of the Jetty client (and server) and ensure that the resources are shut down when the Spring `ApplicationContext` is closed by declaring a Spring-managed bean of type `JettyResourceFactory`, as the following example shows:

```

@Bean
public JettyResourceFactory resourceFactory() {
    return new JettyResourceFactory();
}

@Bean
public WebClient webClient() {

    Consumer<HttpClient> customizer = client -> {
        // Further customizations...
    };

    ClientHttpConnector connector =
        new JettyClientHttpConnector(resourceFactory(), customizer); ①

    return WebClient.builder().clientConnector(connector).build(); ②
}

```

① Use the `JettyClientHttpConnector` constructor with resource factory.

② Plug the connector into the `WebClient.Builder`.

```

== retrieve()

```

The `retrieve()` method is the easiest way to get a response body and decode it. The following example shows how to do so:

```

WebClient client = WebClient.create("https://example.org");

Mono<Person> result = client.get()
    .uri("/persons/{id}", id).accept(MediaType.APPLICATION_JSON)
    .retrieve()
    .bodyToMono(Person.class);

```

You can also get a stream of objects decoded from the response, as the following example shows:

```

Flux<Quote> result = client.get()
    .uri("/quotes").accept(MediaType.TEXT_EVENT_STREAM)
    .retrieve()
    .bodyToFlux(Quote.class);

```

By default, responses with 4xx or 5xx status codes result in an `WebClientResponseException` or one of its HTTP status specific sub-classes, such as `WebClientResponseException.BadRequest`, `WebClientResponseException.NotFound`, and others. You can also use the `onStatus` method to customize the resulting exception, as the following example shows:

```
Mono<Person> result = client.get()
    .uri("/persons/{id}", id).accept(MediaType.APPLICATION_JSON)
    .retrieve()
    .onStatus(HttpStatus::is4xxServerError, response -> ...)
    .onStatus(HttpStatus::is5xxServerError, response -> ...)
    .bodyToMono(Person.class);
```

When `onStatus` is used, if the response is expected to have content, then the `onStatus` callback should consume it. If not, the content will be automatically drained to ensure resources are released.

`== exchange()`

The `exchange()` method provides more control than the `retrieve` method. The following example is equivalent to `retrieve()` but also provides access to the `ClientResponse`:

```
Mono<Person> result = client.get()
    .uri("/persons/{id}", id).accept(MediaType.APPLICATION_JSON)
    .exchange()
    .flatMap(response -> response.bodyToMono(Person.class));
```

At this level, you can also create a full `ResponseEntity`:

```
Mono<ResponseEntity<Person>> result = client.get()
    .uri("/persons/{id}", id).accept(MediaType.APPLICATION_JSON)
    .exchange()
    .flatMap(response -> response.toEntity(Person.class));
```

Note that (unlike `retrieve()`), with `exchange()`, there are no automatic error signals for 4xx and 5xx responses. You have to check the status code and decide how to proceed.



When you use `exchange()`, you must always use any of the `body` or `toEntity` methods of `ClientResponse` to ensure resources are released and to avoid potential issues with HTTP connection pooling. You can use `bodyToMono(Void.class)` if no response content is expected. However, if the response does have content, the connection is closed and is not placed back in the pool.

== Request Body

The request body can be encoded from an `Object`, as the following example shows:

```
Mono<Person> personMono = ... ;

Mono<Void> result = client.post()
    .uri("/persons/{id}", id)
    .contentType(MediaType.APPLICATION_JSON)
    .body(personMono, Person.class)
    .retrieve()
    .bodyToMono(Void.class);
```

You can also have a stream of objects be encoded, as the following example shows:

```
Flux<Person> personFlux = ... ;

Mono<Void> result = client.post()
    .uri("/persons/{id}", id)
    .contentType(MediaType.APPLICATION_STREAM_JSON)
    .body(personFlux, Person.class)
    .retrieve()
    .bodyToMono(Void.class);
```

Alternatively, if you have the actual value, you can use the `syncBody` shortcut method, as the following example shows:

```

Person person = ... ;

Mono<Void> result = client.post()
    .uri("/persons/{id}", id)
    .contentType(MediaType.APPLICATION_JSON)
    .syncBody(person)
    .retrieve()
    .bodyToMono(Void.class);

```

### === Form Data

To send form data, you can provide a `MultiValueMap<String, String>` as the body. Note that the content is automatically set to `application/x-www-form-urlencoded` by the `FormHttpMessageWriter`. The following example shows how to use `MultiValueMap<String, String>`:

```

MultiValueMap<String, String> formData = ... ;

Mono<Void> result = client.post()
    .uri("/path", id)
    .syncBody(formData)
    .retrieve()
    .bodyToMono(Void.class);

```

You can also supply form data in-line by using `BodyInserters`, as the following example shows:

```

import static org.springframework.web.reactive.function.BodyInserters.*;

Mono<Void> result = client.post()
    .uri("/path", id)
    .body(fromFormData("k1", "v1").with("k2", "v2"))
    .retrieve()
    .bodyToMono(Void.class);

```

### === Multipart Data

To send multipart data, you need to provide a `MultiValueMap<String, ?>` whose values are either `Object` instances that represent part content or `HttpEntity` instances that represent the content and headers for a part. `MultipartBodyBuilder` provides a convenient API to prepare a multipart request. The following example shows how to create a `MultiValueMap<String, ?>`:

```
MultipartBodyBuilder builder = new MultipartBodyBuilder();
builder.part("fieldPart", "fieldValue");
builder.part("filePart", new FileSystemResource("../logo.png"));
builder.part("jsonPart", new Person("Jason"));

MultiValueMap<String, HttpEntity<?>> parts = builder.build();
```

In most cases, you do not have to specify the `Content-Type` for each part. The content type is determined automatically based on the `HttpMessageWriter` chosen to serialize it or, in the case of a `Resource`, based on the file extension. If necessary, you can explicitly provide the `MediaType` to use for each part through one of the overloaded builder `part` methods.

Once a `MultiValueMap` is prepared, the easiest way to pass it to the `WebClient` is through the `syncBody` method, as the following example shows:

```
MultipartBodyBuilder builder = ...;

Mono<Void> result = client.post()
    .uri("/path", id)
    .syncBody(builder.build())
    .retrieve()
    .bodyToMono(Void.class);
```

If the `MultiValueMap` contains at least one non-`String` value, which could also represent regular form data (that is, `application/x-www-form-urlencoded`), you need not set the `Content-Type` to `multipart/form-data`. This is always the case when using `MultipartBodyBuilder`, which ensures an `HttpEntity` wrapper.

As an alternative to `MultipartBodyBuilder`, you can also provide multipart content, inline-style, through the built-in `BodyInserters`, as the following example shows:

```
import static org.springframework.web.reactive.function.BodyInserters.*;

Mono<Void> result = client.post()
    .uri("/path", id)
    .body(fromMultipartData("fieldPart", "value").with("filePart", resource))
    .retrieve()
    .bodyToMono(Void.class);
```

## == Client Filters

You can register a client filter (`ExchangeFilterFunction`) through the `WebClient.Builder` in order to intercept and modify requests, as the following example shows:

```
WebClient client = WebClient.builder()
    .filter((request, next) -> {

        ClientRequest filtered = ClientRequest.from(request)
            .header("foo", "bar")
            .build();

        return next.exchange(filtered);
    })
    .build();
```

This can be used for cross-cutting concerns, such as authentication. The following example uses a filter for basic authentication through a static factory method:

```
// static import of ExchangeFilterFunctions.basicAuthentication

WebClient client = WebClient.builder()
    .filter(basicAuthentication("user", "password"))
    .build();
```

Filters apply globally to every request. To change a filter's behavior for a specific request, you can add request attributes to the `ClientRequest` that can then be accessed by all filters in the chain, as the following example shows:

```

WebClient client = WebClient.builder()
    .filter((request, next) -> {
        Optional<Object> usr = request.attribute("myAttribute");
        // ...
    })
    .build();

client.get().uri("https://example.org/")
    .attribute("myAttribute", "...")
    .retrieve()
    .bodyToMono(Void.class);

}

```

You can also replicate an existing `WebClient`, insert new filters, or remove already registered filters. The following example, inserts a basic authentication filter at index 0:

```

// static import of ExchangeFilterFunctions.basicAuthentication

WebClient client = webClient.mutate()
    .filters(filterList -> {
        filterList.add(0, basicAuthentication("user", "password"));
    })
    .build();

```



== Synchronous Use

**WebClient** can be used in synchronous style by blocking at the end for the result:

```
Person person = client.get().uri("/person/{id}", i).retrieve()
    .bodyToMono(Person.class)
    .block();

List<Person> persons = client.get().uri("/persons").retrieve()
    .bodyToFlux(Person.class)
    .collectList()
    .block();
```

However if multiple calls need to be made, it's more efficient to avoid blocking on each response individually, and instead wait for the combined result:

```
Mono<Person> personMono = client.get().uri("/person/{id}", personId)
    .retrieve().bodyToMono(Person.class);

Mono<List<Hobby>> hobbiesMono = client.get().uri("/person/{id}/hobbies", personId)
    .retrieve().bodyToFlux(Hobby.class).collectList();

Map<String, Object> data = Mono.zip(personMono, hobbiesMono, (person, hobbies) ->
{
    Map<String, String> map = new LinkedHashMap<>();
    map.put("person", personName);
    map.put("hobbies", hobbies);
    return map;
})
    .block();
```

The above is merely one example. There are lots of other patterns and operators for putting together a reactive pipeline that makes many remote calls, potentially some nested, inter-dependent, without ever blocking until the end.

You should never have to block in a Spring MVC controller. Simply return the resulting **Flux** or **Mono** from the controller method.

## == Testing

To test code that uses the `WebClient`, you can use a mock web server, such as the `OkHttpMockWebServer`. To see an example of its use, check out `WebClientIntegrationTests` in the Spring Framework test suite or the `static-server` sample in the OkHttp repository.

## = WebSockets [Same as in the Servlet stack](#)

This part of the reference documentation covers support for reactive-stack WebSocket messaging.

## = Introduction to WebSocket

The WebSocket protocol, [RFC 6455](#), provides a standardized way to establish a full-duplex, two-way communication channel between client and server over a single TCP connection. It is a different TCP protocol from HTTP but is designed to work over HTTP, using ports 80 and 443 and allowing re-use of existing firewall rules.

A WebSocket interaction begins with an HTTP request that uses the HTTP `Upgrade` header to upgrade or, in this case, to switch to the WebSocket protocol. The following example shows such an interaction:

```
GET /spring-websocket-portfolio/portfolio HTTP/1.1
Host: localhost:8080
Upgrade: websocket ①
Connection: Upgrade ②
Sec-WebSocket-Key: Uc9l9TMkWGbHFD2qnFHltg==
Sec-WebSocket-Protocol: v10.stomp, v11.stomp
Sec-WebSocket-Version: 13
Origin: http://localhost:8080
```

① The `Upgrade` header.

② Using the `Upgrade` connection.

Instead of the usual 200 status code, a server with WebSocket support returns output similar to the following:

```
HTTP/1.1 101 Switching Protocols ①
Upgrade: websocket
Connection: Upgrade
Sec-WebSocket-Accept: 1qVdfYHU9hP0l4JYYNXF623Gzn0=
Sec-WebSocket-Protocol: v10.stomp
```

① Protocol switch

After a successful handshake, the TCP socket underlying the HTTP upgrade request remains open for both the client and the server to continue to send and receive messages.

A complete introduction of how WebSockets work is beyond the scope of this document. See RFC 6455, the WebSocket chapter of HTML5, or any of the many introductions and tutorials on the Web.

Note that, if a WebSocket server is running behind a web server (e.g. nginx), you likely need to configure it to pass WebSocket upgrade requests on to the WebSocket server. Likewise, if the application runs in a cloud environment, check the instructions of the cloud provider related to WebSocket support.

## == HTTP Versus WebSocket

Even though WebSocket is designed to be HTTP-compatible and starts with an HTTP request, it is important to understand that the two protocols lead to very different architectures and application programming models.

In HTTP and REST, an application is modeled as many URLs. To interact with the application, clients access those URLs, request-response style. Servers route requests to the appropriate handler based on the HTTP URL, method, and headers.

By contrast, in WebSockets, there is usually only one URL for the initial connect. Subsequently, all application messages flow on that same TCP connection. This points to an entirely different asynchronous, event-driven, messaging architecture.

WebSocket is also a low-level transport protocol, which, unlike HTTP, does not prescribe any semantics to the content of messages. That means that there is no way to route or process a message unless the client and the server agree on message semantics.

WebSocket clients and servers can negotiate the use of a higher-level, messaging protocol (for example, STOMP), through the **Sec-WebSocket-Protocol** header on the HTTP handshake request. In the absence of that, they need to come up with their own conventions.

## == When to Use WebSockets

WebSockets can make a web page be dynamic and interactive. However, in many cases, a combination of Ajax and HTTP streaming or long polling can provide a simple and effective solution.

For example, news, mail, and social feeds need to update dynamically, but it may be perfectly okay to do so every few minutes. Collaboration, games, and financial apps, on the other hand, need to be much closer to real-time.

Latency alone is not a deciding factor. If the volume of messages is relatively low (for example, monitoring network failures) HTTP streaming or polling can provide an effective solution. It is the combination of low latency, high frequency, and high volume that make the best case for the use of WebSocket.

Keep in mind also that over the Internet, restrictive proxies that are outside of your control may preclude WebSocket interactions, either because they are not configured to pass on the

**Upgrade** header or because they close long-lived connections that appear idle. This means that the use of WebSocket for internal applications within the firewall is a more straightforward decision than it is for public facing applications.

== WebSocket API [Same as in the Servlet stack](#)

The Spring Framework provides a WebSocket API that you can use to write client- and server-side applications that handle WebSocket messages.

=== Server [Same as in the Servlet stack](#)

To create a WebSocket server, you can first create a **WebSocketHandler**. The following example shows how to do so:

```
import org.springframework.web.reactive.socket.WebSocketHandler;
import org.springframework.web.reactive.socket.WebSocketSession;

public class MyWebSocketHandler implements WebSocketHandler {

    @Override
    public Mono<Void> handle(WebSocketSession session) {
        // ...
    }
}
```

Then you can map it to a URL and add a **WebSocketHandlerAdapter**, as the following example shows:

```

@Configuration
static class WebConfig {

    @Bean
    public HandlerMapping handlerMapping() {
        Map<String, WebSocketHandler> map = new HashMap<>();
        map.put("/path", new MyWebSocketHandler());

        SimpleUrlHandlerMapping mapping = new SimpleUrlHandlerMapping();
        mapping.setUrlMap(map);
        mapping.setOrder(-1); // before annotated controllers
        return mapping;
    }

    @Bean
    public WebSocketHandlerAdapter handlerAdapter() {
        return new WebSocketHandlerAdapter();
    }
}

```

### === WebSocketHandler

The `handle` method of `WebSocketHandler` takes `WebSocketSession` and returns `Mono<Void>` to indicate when application handling of the session is complete. The session is handled through two streams, one for inbound and one for outbound messages. The following table describes the two methods that handle the streams:

WebSocketSession method	Description
<code>Flux&lt;WebSocketMessage&gt; receive()</code>	Provides access to the inbound message stream and completes when the connection is closed.
<code>Mono&lt;Void&gt; send(Publisher&lt;WebSocketMessage&gt;)</code>	Takes a source for outgoing messages, writes the messages, and returns a <code>Mono&lt;Void&gt;</code> that completes when the source completes and writing is done.

A `WebSocketHandler` must compose the inbound and outbound streams into a unified flow and return a `Mono<Void>` that reflects the completion of that flow. Depending on application requirements, the unified flow completes when:

- Either the inbound or the outbound message stream completes.
- The inbound stream completes (that is, the connection closed), while the outbound stream is infinite.
- At a chosen point, through the `close` method of `WebSocketSession`.

When inbound and outbound message streams are composed together, there is no need to check if the connection is open, since Reactive Streams signals terminate activity. The inbound stream receives a completion or error signal, and the outbound stream receives a cancellation signal.

The most basic implementation of a handler is one that handles the inbound stream. The following example shows such an implementation:

```

class ExampleHandler implements WebSocketHandler {

    @Override
    public Mono<Void> handle(WebSocketSession session) {
        return session.receive()           ❶
            .doOnNext(message -> {
                // ...                      ❷
            })
            .concatMap(message -> {
                // ...                      ❸
            })
            .then();                        ❹
    }
}

```

- ❶ Access the stream of inbound messages.
- ❷ Do something with each message.
- ❸ Perform nested asynchronous operations that use the message content.
- ❹ Return a `Mono<Void>` that completes when receiving completes.



For nested, asynchronous operations, you may need to call `message.retain()` on underlying servers that use pooled data buffers (for example, Netty). Otherwise, the data buffer may be released before you have had a chance to read the data. For more background, see [Data Buffers and Codecs](#).

The following implementation combines the inbound and outbound streams:

```

class ExampleHandler implements WebSocketHandler {

    @Override
    public Mono<Void> handle(WebSocketSession session) {

        Flux<WebSocketMessage> output = session.receive()           ❶
            .doOnNext(message -> {
                // ...
            })
            .concatMap(message -> {
                // ...
            })
            .map(value -> session.textMessage("Echo " + value));    ❷

        return session.send(output);                                ❸
    }
}

```

- ❶ Handle the inbound message stream.

- ② Create the outbound message, producing a combined flow.
- ③ Return a `Mono<Void>` that does not complete while we continue to receive.

Inbound and outbound streams can be independent and be joined only for completion, as the following example shows:

```
class ExampleHandler implements WebSocketHandler {  
  
    @Override  
    public Mono<Void> handle(WebSocketSession session) {  
  
        Mono<Void> input = session.receive()                                ①  
            .doOnNext(message -> {  
                // ...  
            })  
            .concatMap(message -> {  
                // ...  
            })  
            .then();  
  
        Flux<String> source = ... ;  
        Mono<Void> output = session.send(source.map(session::textMessage)); ②  
  
        return Mono.zip(input, output).then();                             ③  
    }  
}
```

- ① Handle inbound message stream.
- ② Send outgoing messages.
- ③ Join the streams and return a `Mono<Void>` that completes when either stream ends.



=== `DataBuffer`

`DataBuffer` is the representation for a byte buffer in WebFlux. The Spring Core part of the reference has more on that in the section on [Data Buffers and Codecs](#). The key point to understand is that on some servers like Netty, byte buffers are pooled and reference counted, and must be released when consumed to avoid memory leaks.

When running on Netty, applications must use `DataBufferUtils.retain(dataBuffer)` if they wish to hold on input data buffers in order to ensure they are not released, and subsequently use `DataBufferUtils.release(dataBuffer)` when the buffers are consumed.

=== Handshake [Same as in the Servlet stack](#)

`WebSocketHandlerAdapter` delegates to a `WebSocketService`. By default, that is an instance of `HandshakeWebSocketService`, which performs basic checks on the WebSocket request and then uses `RequestUpgradeStrategy` for the server in use. Currently, there is built-in support for Reactor Netty, Tomcat, Jetty, and Undertow.

`HandshakeWebSocketService` exposes a `sessionAttributePredicate` property that allows setting a `Predicate<String>` to extract attributes from the `WebSession` and insert them into the attributes of the `WebSocketSession`.

=== Server Configuration [Same as in the Servlet stack](#)

The `RequestUpgradeStrategy` for each server exposes WebSocket-related configuration options available for the underlying WebSocket engine. The following example sets WebSocket options when running on Tomcat:

```
@Configuration
static class WebConfig {

    @Bean
    public WebSocketHandlerAdapter handlerAdapter() {
        return new WebSocketHandlerAdapter(webSocketService());
    }

    @Bean
    public WebSocketService webSocketService() {
        TomcatRequestUpgradeStrategy strategy = new TomcatRequestUpgradeStrategy();
        strategy.setMaxSessionIdleTimeout(0L);
        return new HandshakeWebSocketService(strategy);
    }
}
```

Check the upgrade strategy for your server to see what options are available. Currently, only Tomcat and Jetty expose such options.

=== CORS [Same as in the Servlet stack](#)

The easiest way to configure CORS and restrict access to a WebSocket endpoint is to have your `WebSocketHandler` implement `CorsConfigurationSource` and return a `CorsConfiguraiton` with allowed origins, headers, and other details. If you cannot do that, you can also set the `corsConfigurations` property on the `SimpleUrlHandler` to specify CORS settings by URL pattern. If both are specified, they are combined by using the `combine` method on `CorsConfiguration`.

=== Client

Spring WebFlux provides a `WebSocketClient` abstraction with implementations for Reactor Netty, Tomcat, Jetty, Undertow, and standard Java (that is, JSR-356).



The Tomcat client is effectively an extension of the standard Java one with some extra functionality in the `WebSocketSession` handling to take advantage of the Tomcat-specific API to suspend receiving messages for back pressure.

To start a WebSocket session, you can create an instance of the client and use its `execute` methods:

```
WebSocketClient client = new ReactorNettyWebSocketClient();

URI url = new URI("ws://localhost:8080/path");
client.execute(url, session ->
    session.receive()
        .doOnNext(System.out::println)
        .then());
```

Some clients, such as Jetty, implement `Lifecycle` and need to be stopped and started before you can use them. All clients have constructor options related to configuration of the underlying WebSocket client.

== Testing [Same in Spring MVC](#)

The `spring-test` module provides mock implementations of `ServerHttpRequest`, `ServerHttpResponse`, and `ServerWebExchange`. See [Spring Web Reactive](#) for a discussion of mock objects.

`WebTestClient` builds on these mock request and response objects to provide support for testing WebFlux applications without an HTTP server. You can use the `WebTestClient` for end-to-end integration tests, too.

== Reactive Libraries

`spring-webflux` depends on `reactor-core` and uses it internally to compose asynchronous logic and to provide Reactive Streams support. Generally, WebFlux APIs return `Flux` or `Mono` (since those are used internally) and leniently accept any Reactive Streams `Publisher` implementation as input. The use of `Flux` versus `Mono` is important, because it helps to express cardinality—for example, whether a single or multiple asynchronous values are expected, and that can be essential for making decisions (for example, when encoding or decoding HTTP messages).

For annotated controllers, WebFlux transparently adapts to the reactive library chosen by the application. This is done with the help of the `ReactiveAdapterRegistry`, which provides pluggable support for reactive library and other asynchronous types. The registry has built-in support for RxJava and `CompletableFuture`, but you can register others, too.

For functional APIs (such as [Functional Endpoints](#), the `WebClient`, and others), the general rules for WebFlux APIs apply—`Flux` and `Mono` as return values and a Reactive Streams `Publisher` as input. When a `Publisher`, whether custom or from another reactive library, is provided, it can be treated only as a stream with unknown semantics (0..N). If, however, the semantics are known, you can wrap it with `Flux` or `Mono.from(Publisher)` instead of passing the raw `Publisher`.

For example, given a `Publisher` that is not a `Mono`, the Jackson JSON message writer expects multiple values. If the media type implies an infinite stream (for example, `application/json+stream`), values are written and flushed individually. Otherwise, values are buffered into a list and rendered as a JSON array.